# **Technical Data**




# Safety switch

Series SEL1- with separate actuator

#### Description SEL1-A1Z PLC

Article number 6016369170

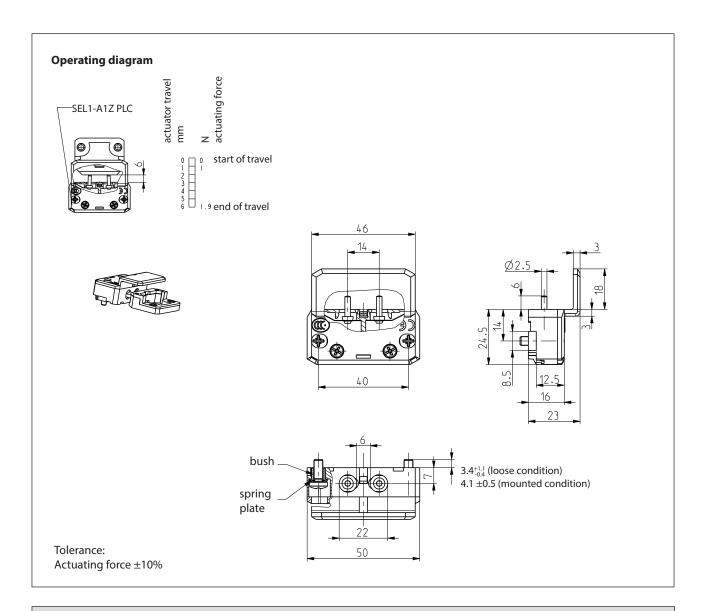

Electrical data		
Rated insulation voltage	U	500 V
Rated impulse withstand voltage	U	2.5 KV
Conv. thermal current	I <sub>the</sub>	4 A
Rated operational voltage	U <sub>e</sub>	230 V AC; 200 V DC (according to EN 81-20, -50)
Rated operational current	l <sub>e</sub>	2 A (according to EN 81-20, -50)
Direct opening action	$\ominus$	acc. to IEC/EN 60947-5-1, Annex K
Gap between NC-contacts	$(\overline{\mathbf{T}})$	DIN EN 81-20
Short-circuit protective device		Fuse 6 A gL

BERNSTEIN www.bernstein.eu . www.bernstein-safesolutions.cn

Technical modifications and errors excepted.

The technical datasheet corresponds to the technical state as of 2022-05-23 and will not be removed in case of changes.

### **Technical Data**



Mechanical data				
Enclosure		PC (Self-extinguishing) transparent		
Cover		PC (Self-extinguishing) transparent		
Actuator		need to order separately		
Ambient air temperature		-30 ° C + 70 ° C		
Contact type		1 N.C.		
Mechanical life		$10 \times 10^6$ operating cycles at $\le 30$ operating cycles /min 1 x 10 <sup>6</sup> operating cycles at $\le 60$ operating cycles /min		
Switching frequency		≤ 60 / min.		
Assembly	Safety switch	2 x M4 thread rolling captive screws according to DIN 7500		
Connection		2 screw connections (M3,5)		
Conductor cross-sections		Solid wire: 0,5 1,5 mm² or Stranded wire with ferrules: 0,5 1,5 mm²		
Weight		≈ 0,02 kg		
Installation position		operator definable		
Protection type		IP00 acc. to IEC/EN 60529		

Standards	
	DIN EN 60947-5-1
	EN 81-20, EN 81-50

#### **EU Conformity**

	acc. to directive 2014/35/EU(Low-Voltage-Directive)	
Approvals		
	TÜV SÜD	
	<sub>c</sub> CSA <sub>us</sub>	
	ASME	
	<sub>c</sub> UL <sub>us</sub>	
	CCC	

#### Notes

The electrical data apply to the PL actuator. Do not use switch as end stop.

Door switch to be used in elevator doors.

The switch must be so installed that the current-carrying metal parts can not be touched directly by hand! The cable entry must be covered by additional measures at the installation site.