Technical Data




Safety switch

Series SEL2- with separate actuator

Description SEL2-A1Z PLC

Article number 6016369171

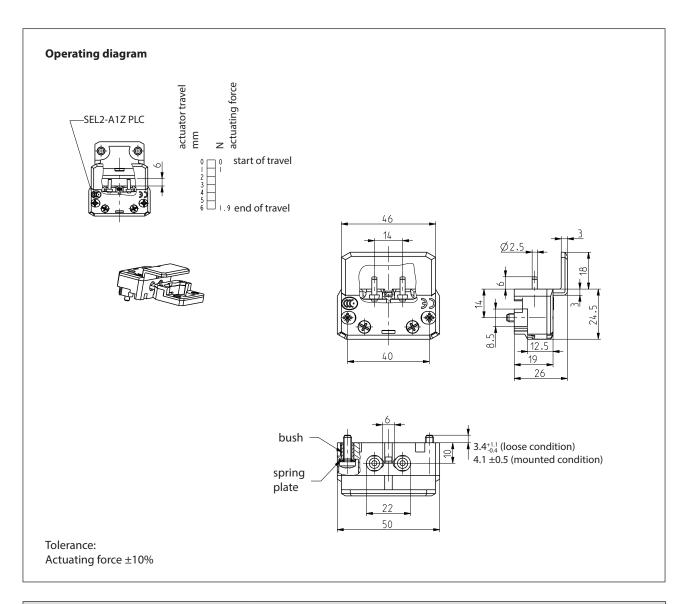

Electrical data		
Rated insulation voltage	U	500 V
Rated impulse withstand voltage	U	2.5 KV
Conv. thermal current	I _{the}	4 A
Rated operational voltage	U _e	230 V AC; 200 V DC (according to EN 81-20, -50)
Rated operational current	l _e	2 A (according to EN 81-20, -50)
Direct opening action	\ominus	acc. to IEC/EN 60947-5-1, Annex K
Gap between NC-contacts	\bigcirc	DIN EN 81-20
Short-circuit protective device		Fuse 6 A gL

BERNSTEIN www.bernstein.eu . www.bernstein-safesolutions.cn

Technical modifications and errors excepted.

The technical datasheet corresponds to the technical state as of 2022-05-23 and will not be removed in case of changes.

Technical Data



Mechanical data		
Enclosure		PC (Self-extinguishing) red
Cover		PC (Self-extinguishing) transparent
Actuator		need to order separately
Ambient air temperature		-30 ° C + 70 ° C
Contact type		1 N.C.
Mechanical life		10×10^6 operating cycles at ≤ 30 operating cycles /min 1 x 10 ⁶ operating cycles at ≤ 60 operating cycles /min
Switching frequency		≤ 60 / min.
Assembly	Safety switch	2 x M4 thread rolling captive screws according to DIN 7500
Connection		2 screw connections (M3,5)
Conductor cross-sections		Solid wire: 0,5 1,5 mm² or Stranded wire with ferrules: 0,5 1,5 mm²
Weight		≈ 0,02 kg
Installation position		operator definable
Protection type		IP00 acc. to IEC/EN 60529

Standards	
	DIN EN 60947-5-1
	EN 81-20, EN 81-50

EU Conformity

acc. to directive 2014/35/EU(Low-Voltage-Directive)

Approvals	
	TÜV SÜD
	cCSA _{US}
	ASME
	cUL _{us}
	200

Notes

The electrical data apply to the PL actuator. Do not use switch as end stop.

Door switch to be used in elevator doors.

The switch must be so installed that the current-carrying metal parts can not be touched directly by hand! The cable entry must be covered by additional measures at the installation site.