


Safety switch

Series SLK – with separate actuator

Description SLK-F-NC-22-R6-A0-L0-0

Article number 6118169118

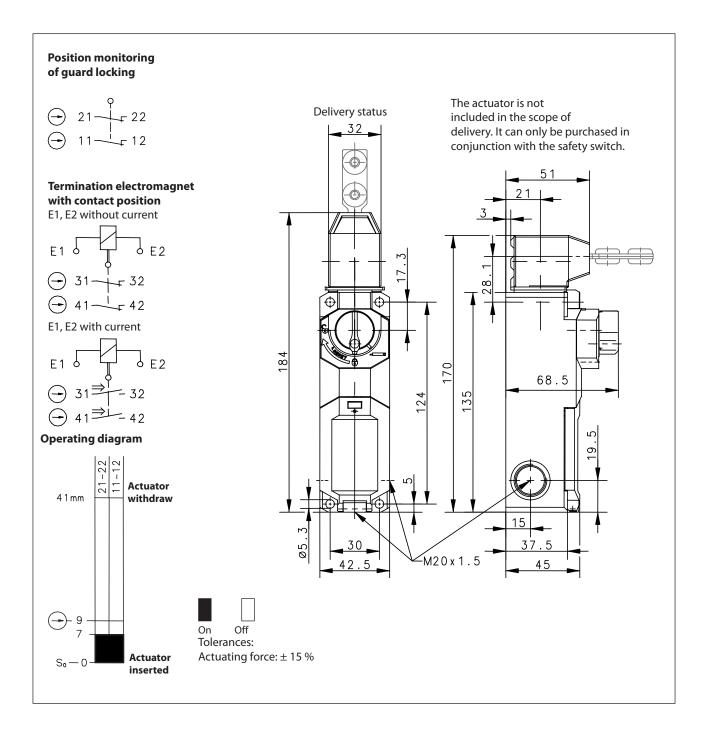

BERNSTEIN AG . Hans-Bernstein-Straße 1 . 32457 Porta Westfalica . www.bernstein.eu

Technical Data



Electrical data		
Protection class		II, totally insulated
Contact elements		
Rated insulation voltage	Ui	250 V
Rated impulse withstand voltage	U_{imp}	2,5 kV
Conv. thermal current	I _{the}	5 A
Utilization category		AC-15, U _e / I _e 230 V / 2,5 A
Direct opening action	\bigcirc	according to IEC/EN 60947-5-1, Annex K
Short-circuit protective device		4 A gG
Electro magnets		
Duty cycle		100 % ED (at E1; E2)
Temperature class		F (155 °C)
Inrush power consumption		65 VA (0,1 s)
Permanent power consumption		8 VA
Switch operations permanent		600 / h
Operating voltage		110 / 230 V AC

Mechanical data		
Enclosure		Thermoplastic, glass fibre reinforced (UL 94-V0)
Cover		Thermoplastic, glass fibre reinforced (UL 94-V0)
Actuating head		Thermoplastic, glass fibre reinforced / Zn-GD
Actuator		Separate actuator (Steel / PA)
Minimum actuating radius	R_{min}	see separate actuators data sheet
Velocity for actuating	V_{max}	0,5 ^m / _s
Extraction force		≥ 27 N
Interlocking principle		Spring force
Unlocking		a) magnetic force b) emergency release from the front and auxiliary release from the back
Hold on force	F_{Zh}	≤ 1500 N acc. to GS-ET-19
Ambient air temperature		-25 ° C +70 ° C
Contact type		4 NC
Switching principle		4 slow make and break contact elements
Mechanical life		1 x 10 ⁶ switching cycles (at max. 600 switch operations / h)
Assembly		4 x M5
Connection		Spring-clamp connection
Conductor cross-sections		0,5 1,5 mm² flexible
Cable entrance		3 x M20 x 1,5
Weight		≈ 0,36 kg
Installation position		operator definable
Protection type		IP67 acc. to IEC/EN 60529

ID for safety engineering	
B10d	2 x 10 ⁶ cycles

Anfahrmöglichkeiten

4 different actuating directions achievable by rotating the actuating head. Changing between horizontal and vertical actuating direction by setting the actuating head in the requested direction.

BERNSTEIN AG . Hans-Bernstein-Straße 1 . 32457 Porta Westfalica . www.bernstein.eu

The technical datasheet corresponds to the technical state as of 2020-10-19 and will not be removed in case of changes.

Technical Data



Standards	
	VDE 0660 T100, DIN EN 60947-1, IEC 60947-1
	VDE 0660 T200, DIN EN 60947-5-1, IEC 60947-5-1
	GS-ET-19
	DIN EN ISO 13849-1

EU Conformity

acc. to directive 2006/42/EC (Safety-of-Machinery-Directive)

Approvals

	DGUV
(CSA _{us} B300 (same polarity)
	ccc

Notes

The degree of protection (IP code) specified applies solely to a property closed cover and the use of an equivalent cable gland with adequate cable.

The switch may not be used as a mechanical stop.

When power is removed from the electromagnet (solenoid) the safety guard will be in locked position.

The emergency release function is activated by rotating the rotary handle 90° clockwise. The supplied key is necessary to reset the emergency release function.

To operate the backside auxiliary release loosen the screw, swivel the cover and turn the hexagonal nut into unlocked position.