


## **Coded Magnetic Switch**

Series MAK-54

Description MAK-5426-C-0.25-M12-L

Article number 6490654361

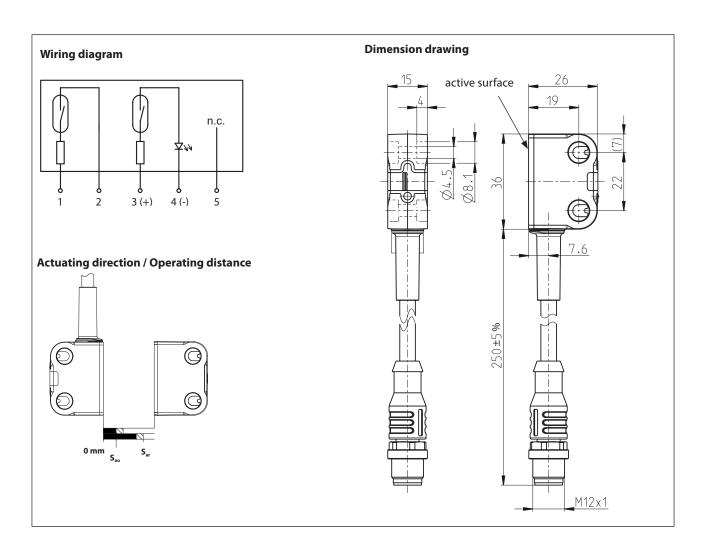

Technical data		
Switching function		2 x NO
Reference magnet		TK-54-CD/2 (6402054085)
Assured operating distance - ON	$S_{ao}$	≥ 6 mm
Assured operating distance - OFF	$S_{ar}$	≤ 15 mm
Repeat accuracy	R	$\pm$ 0,1 mm, under same geometrical conditions at the same temperature
Utilization category		DC-12
Frequency of operating cycles	f	1 Hz



Electrical data		
Max. voltage		30 V DC
Max. switching current		0,02 A
Max. switching capacity		0,25 W
Voltage drop	$U_d$	≤ 3 V
Internal series resistor		27 Ω, per channel
Protection class acc. to EN IEC 61558		III (safety extra-low voltage)
Note		Combinations of switching voltage and switching current must not exceed the maximum switching capacity.

Mechanical data	
Enclosure	PA66 + PA6, black; encapsulated reed contact
Tension relief	TPE, black
Mounting	2 holes Ø 4,5 (for M4 screws)
Indication	1 x LED yellow, actuation status
Temperature range	- 5 °C + 70 °C (cable not fixed mounted) - 25 °C + 70 °C (cable fixed mounted)
Mechanical life	3 x 10 <sup>8</sup> operating cycles
Vibration	10 G (10 - 1200 Hz)
Shock	100 G (11 ms, ½ Sinewave)
Protection type	IP 69 acc. to EN 60529 (only when plugged in with the corresponding counterpart)
Pollution degree	3 acc. to EN 60947-1
Termination type	Cable $5 \times 0.34 \text{ mm}^2$ , PUR-Outer jacket with plug connector M12 male, 5-pole, A coded
Assembly position	optional (assembly on ferromagnetic material means reduction of switch distance)

ID for safety engineering	
B10d	20 x 10 <sup>6</sup> cycles (20 % load)
	0,4 x 10 <sup>6</sup> cycles (nominal load)
Mission time	20 years

Standards	
	DIN EN ISO 13849-1
	EN 60947-5-3
Note	The EN 60947-5-3 standard is only fulfilled by a complete system that consists of a coded magnetic switch with related actuator and suitable safety controller.

EU Conformity	
acc. to directive 2006/42/EC (Safety-of-Machinery-Directive)	

Approvals	<b>®</b>
	UL Listed, Ind. Cont. Eq. / Class 2 Power source

N	_	•	_	_
IV	n	Т	ρ	5

Contact protection must be provided for inductive and capacitive loads.

**BERNSTEIN AG** . Hans-Bernstein-Straße 1 . 32457 Porta Westfalica . www.bernstein.eu