


## Foot-switch Series FS1

Description **FS1-A500-A-0**

Article number **616060024**

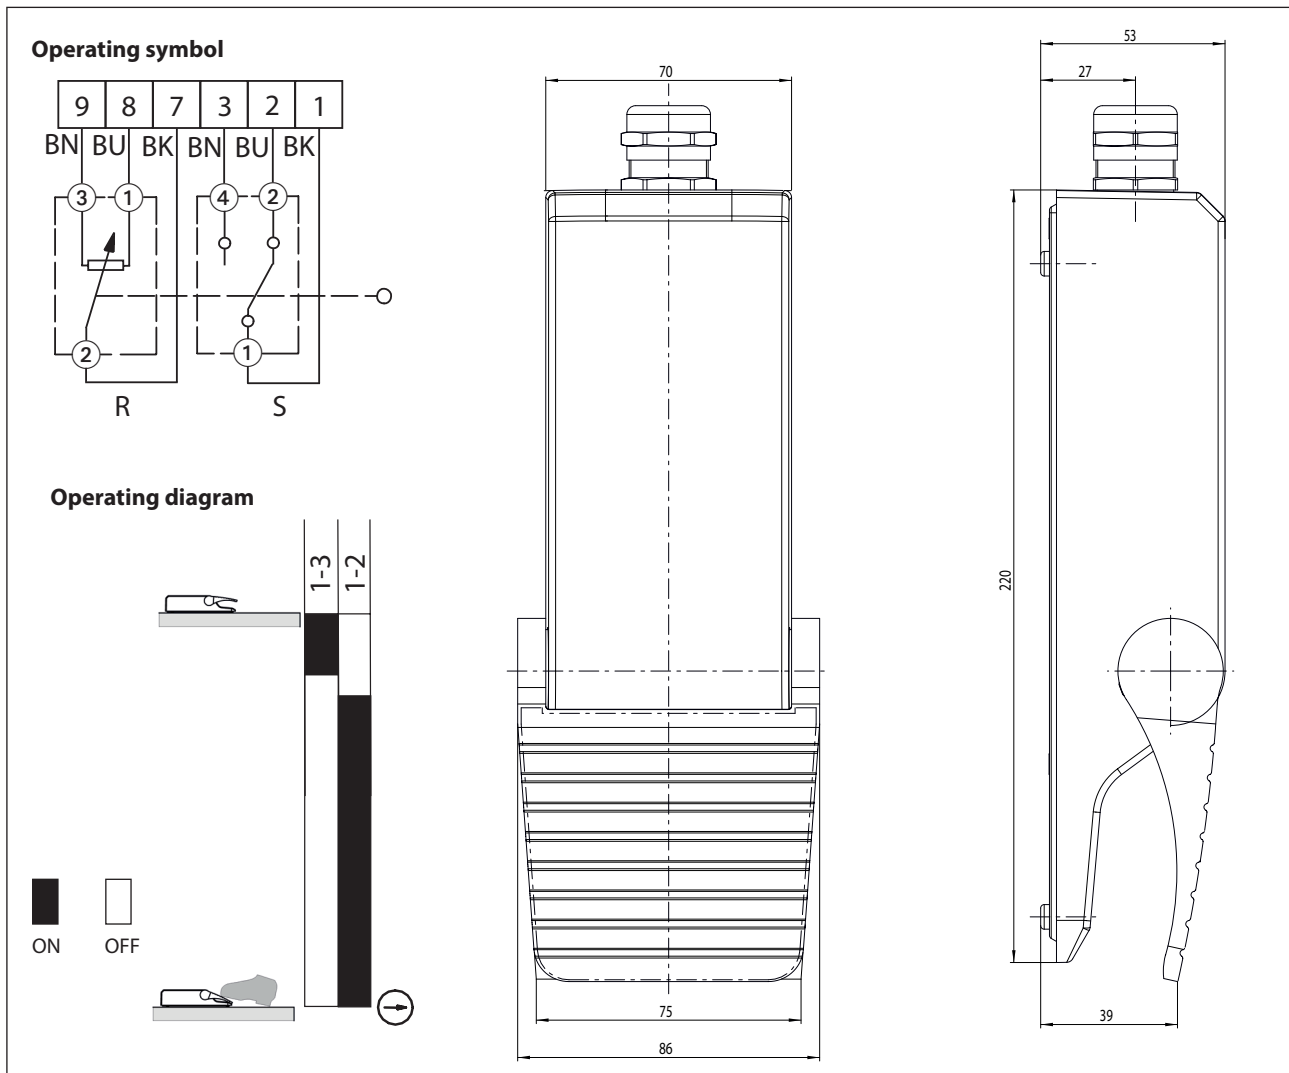

Electrical data	Microswitch	Potentiometer
Rated current	0,5 A	-
Contact current	-	≤ 0,3 mA
Rated operating voltage	30 V DC	30 V DC
Ferrule resistor	-	10 KΩ ±10 %
Max. wiper current in case of malfunction	-	100 mA
Power rating	-	max. 2 W / 70 °C
Protection class	I (based on foot-switch complete)	

<b>Mechanical data</b>	
Enclosure	AL, die-cast (powder-coated), RAL 5002 (ultramarine blue)
Cover	AL, die-cast (powder-coated), RAL 5002 (ultramarine blue)
Actuator	1 pedal (thermoplastic) RAL7036
Ambient air temperature @ $t = \infty$	$-10\text{ °C} \leq T \leq +80\text{ °C}$
$t \leq 2\text{ h}$ (cleaning)	$-10\text{ °C} \leq T \leq +95\text{ °C}$
Normal use condition	temperature $+10\text{ °C} \leq T \leq +40\text{ °C}$ air humidity 5 % ... 95 % - no condensation atmospheric pressure 700 hPa ... 1060 hPa
Storage and transport condition	temperature $-20\text{ °C} \leq T \leq +80\text{ °C}$ air humidity 5 % ... 95 % - no condensation atmospheric pressure 700 hPa ... 1060 hPa
Contact type	Potentiometer with microswitch (changeover contact)
Operating force	$15\text{ N} \pm 10\%$
Mechanical life	50000 rotation cycles of the potentiometer
Switching frequency	$\leq 20$ operating cycles/min
Connection	6 connections (screw terminals M2)
Conductor cross-sections	Solid: $\leq 1,5\text{ mm}^2$ Litz wire with or without ferrules: $\leq 1\text{ mm}^2$
Protection ground	1 x M4
Cable entrance	1 x cable gland M20 x 1,5 (clamping range $\varnothing 7,0 \dots 12,0\text{ mm}$ )
Weight	$\approx 1,3\text{ kg}$
Protection type	IPX8 acc. to IEC/EN 60529 (0,15 bar / 1 h)

<b>Standards</b>
DIN EN 60947-5-1
DIN EN ISO 13849-1

<b>EU Conformity</b>
acc. to directive 2011/65/EU (RoHS-directive)

<b>Notes</b>
The specified protection classification (IP code) applies only when the cover is closed and the appropriate cable is used, in accordance with the clamping range of the above mentioned cable gland.