


Foot-switch
Series KFM2

Description **KFM2-SE1/SE1 SW**

Article number **6169200013**

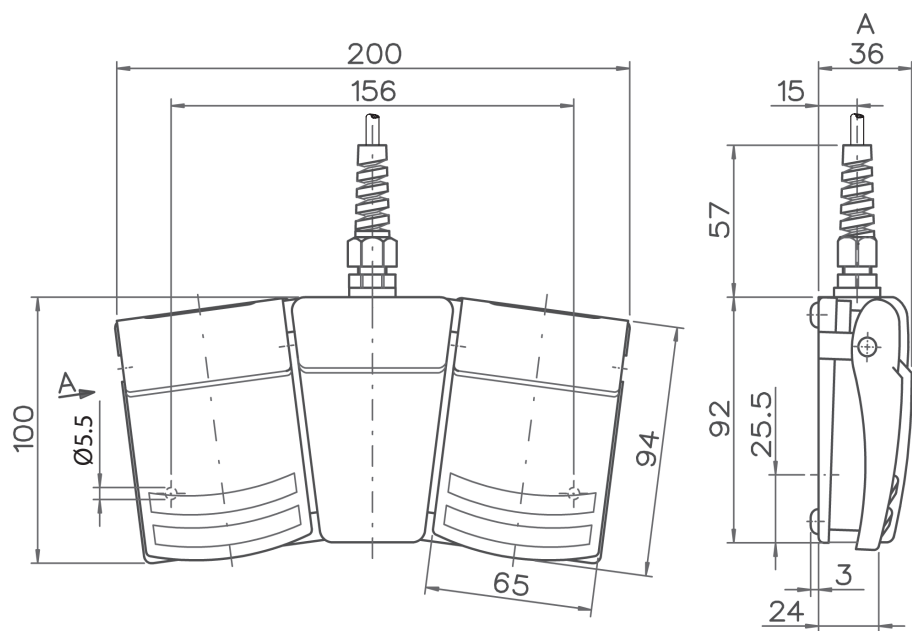


Operating symbol

Pedal left

Pedal right



Plug connector
(female)



Electrical data	
Current rating	max. 6 A
Voltage	max. 250 V AC
Protection class	II, fully insulated

Mechanical Data	
Enclosure	PA6.6 glass fibre reinforced, black-gray (RAL 7021)
Actuator	2 x Foot lever PA6.6 glass fibre reinforced, black-gray (RAL 7021)
Ambient air temperature	-20 °C ... +80 °C
Contact type (each pedal)	1 NO (Snap-action function)
Mechanical life	2 x 10 ⁶ switching cycles
Connection	4 x AWG20 cable, black sheath, length 2 m, with Bulgin miniature circular connector, 6-pin, PXP4011
Cable entry size	1 x cable gland M12 x 1,5 with bend protection
Protection type	IP 65 acc. to IEC/EN 60529 (only with connected socket)

Standards	
	Foot switches are manufactured in accordance with the applicable standards IEC/EN 60204 and IEC/EN 60947-5-1.

EU Conformity	
	All components are RoHS-compliant.