


Plastic bodied limit switch Series I49

Description **I49-SU1Z AH 0,12M**

Article number **6189185084**

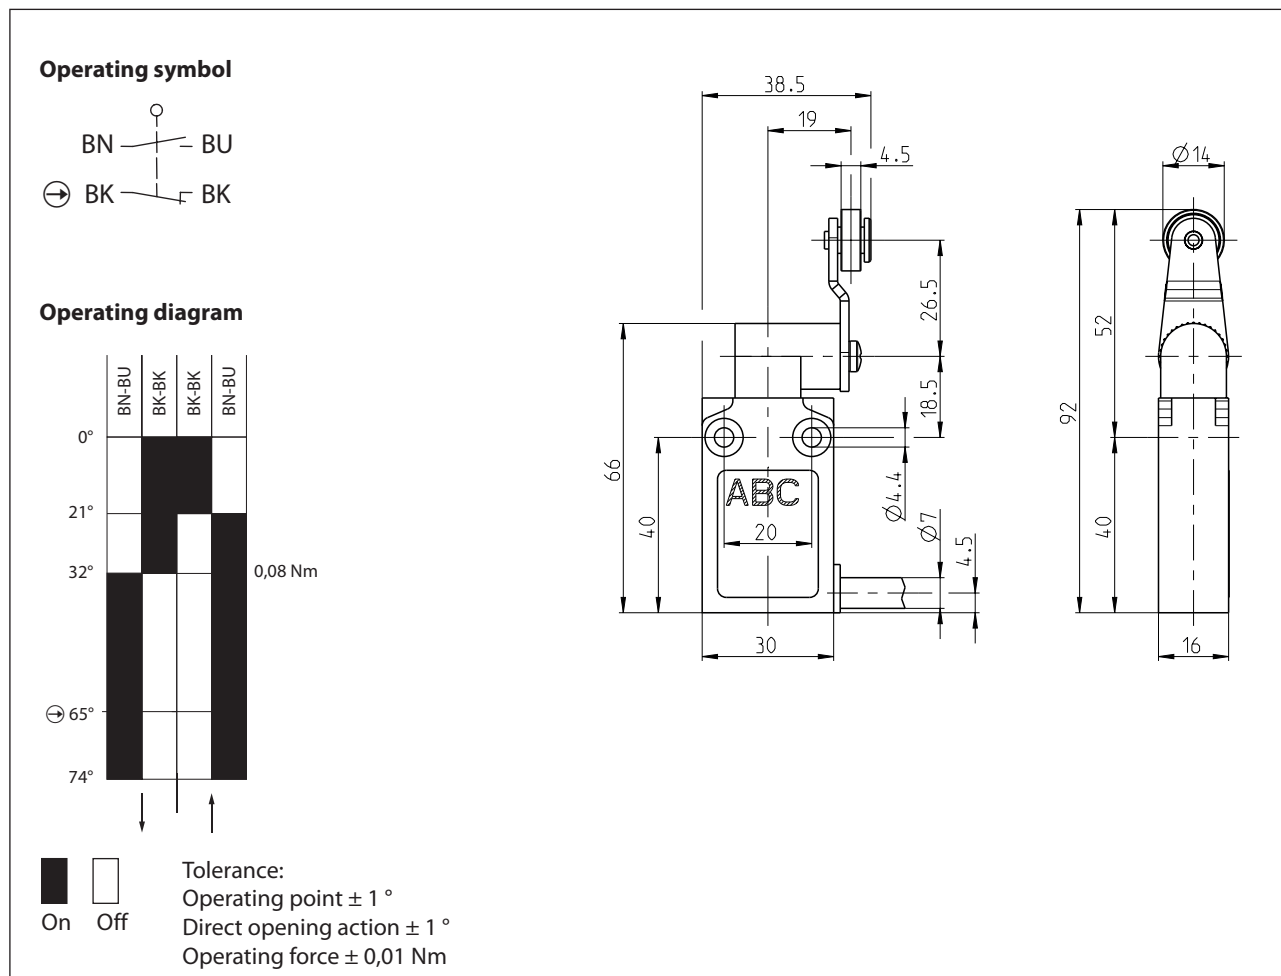

Electrical Data

Rated insulation voltage
acc. to IEC 947-1 and DIN EN 60947-1
acc. to UL 508 and CSA C22-2 n° 14

U_i 400 V (degree of pollution 3)
B300, R300

Conv. thermal current
acc. to IEC 947-5-1 and DIN EN 60947-5-1) $0 < 40^\circ\text{C}$

I_{the} 10 A

Rated operational voltage

U_e 240 V

Utilization category

AC-15, 24 V - 10 A / 240 V - 3 A
DC-13, 24 V - 2.8 A / 125 V - 0.22 A / 250 V - 0.27 A

Direct opening action

\ominus acc. to IEC/EN 60947-5-1

Short-circuit protective device
 $U_e < 500$ V a.c. - gG type fuses

Fuse 10 A gG

Protection class

II, totally insulated

Mechanical data	
Enclosure	Pre-wired, Double insulation, Plastic Casing IP67, 30 mm width (polymeric)
Actuator	Plunger (nikel -plated), lever (galvanized), roller Ø14 mm (nylon)
Ambient air temperature	
-during operation	-25 °C ... +70 °C
-for storage	-40 °C ... +70 °C
Contact type	Snap action, 1 NO, 1 NC
Mechanical life	10 x 10 ⁶ switching cycles
Switching frequency	60 / min
Velocity for actuating	1,5 m/s
Resistance between contacts	< 25 mΩ
Connection	PUR 4 x 0,75 mm ² UL cable, 0,12 m length
Installation position	All positions are authorized
Protection type	IP67 acc. to IEC/EN 60529

ID for safety engineering	
B10d N.C.	20 x 10 ⁶ cycles
B10d N.O.	1 x 10 ⁶ cycles

Standards	
	DIN EN 60947-5-1
	DIN EN ISO 13849-1

EU Conformity	
	acc. to directive 2014/35/EU (Low-Voltage-Directive)

Approvals	
	cUL _{US}
	CCC

Notes	
	Type 1 enclosure ("indoor use only") acc. to UL50