
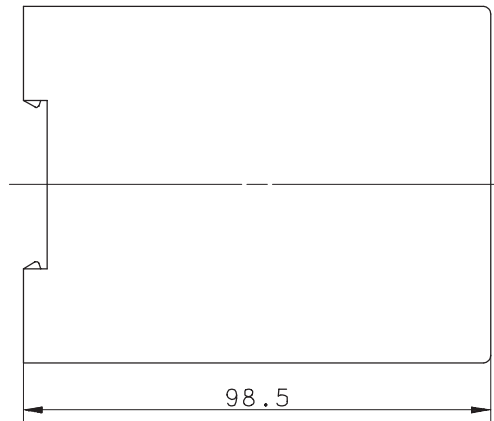
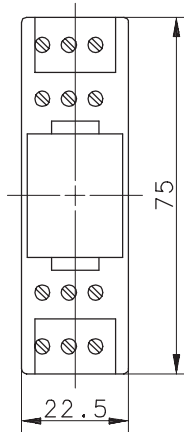


Type: **MÜN-2A3/D24-FL**Art.-Nr.: **639.4002.025**

21.06.99/0691

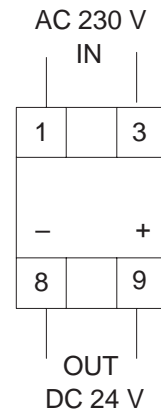

Anschlußbild:

**1. Betriebsdaten primär**Bemessungsbetriebsspannung  $U_e$  : AC 230 V ( $U_{emin} - 10\%$  /  $U_{emax} + 6\%$ )Betriebsspannung  $U_B$  : AC 207 ... 244 V**2. Ausgangsdaten sekundär**

Schaltspannung : DC 24 V

Schaltstrom max. : 80 mA



**3. Betriebs- und Umgebungsbedingungen**Temperaturbereiche : 0 °C bis +55 °C (Betriebsumgebungstemperatur)  
-25 °C bis +70 °C (Lager- und Transporttemperatur)

Schutzart : IP 20 nach IEC 529, EN 60529


Gehäuse : Werkstoff: PC  
Schnellbefestigung für Tragschiene nach DIN 50022  
Schraubanschlußklemmen für Leitungen bis max. 2,5 mm<sup>2</sup>

Type: **MÜN-2A3/D24-FL**Art.-No.: **639.4002.025**

21.06.99/0691

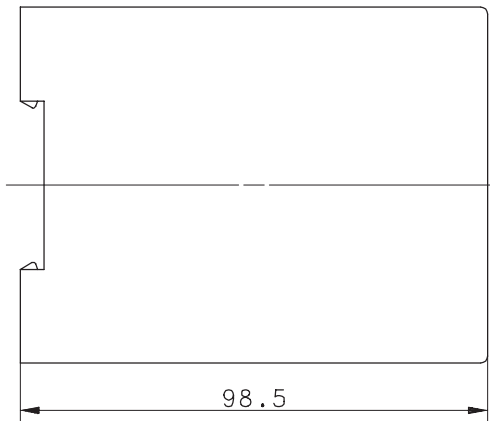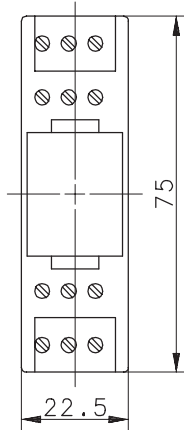

Wiring Diagram:

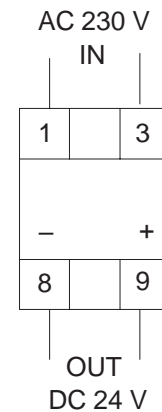**1. Operating data primary**Rated operational voltage       $U_e$  : AC 230 V ( $U_{emin} - 10\%$  /  $U_{emax} + 6\%$ )Operational voltage range       $U_B$  : AC 207 ... 244 V**2. Output data secondary**

Max. switching voltage            : DC 24 V

Max. switched current            : 80 mA

**3. Operating and environmental conditions**Temperature range                : 0 °C ... +55 °C (Ambient operating temperature)  
    : -25 °C ... +70 °C (Transport and storage temperature)

Protection                         : IP 20 according to IEC 529, EN 60529 (NEMA 1)

Housing                              : Material: PC  
    : Quick snap for mounting rails acc. to DIN 50022  
    : Screw terminals for wires  $\leq 2,5 \text{ mm}^2$