


## Capacitive Proximity Switch

### Series M18

Description KCB-M18PS/009-KLPS12

Article number 6507905005

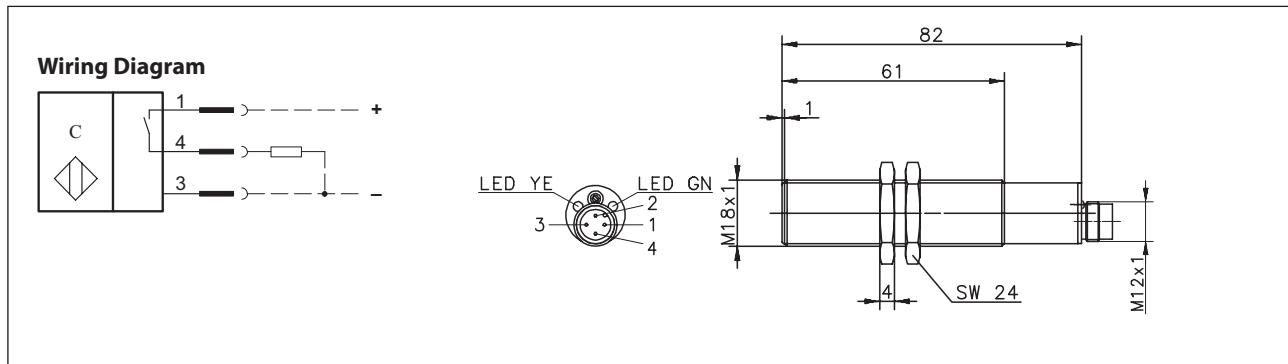

#### Identifying characteristics in accordance with EN 60947-5-2

| Electrical data                  |           |   |
|----------------------------------|-----------|---|
| Rated operating distance         | $S_n$     | 8,8 mm  |
| Mounting                         |           | flush   |
| Standard target                  |           | 18 x 18 x 1 mm; material: steel; connected to earth |
| Effective operating distance     | $S_r$     | 8,8 mm ± 5%   |
| Assured operating distance       | $S_a$     | 0 ≤ $S_a$ ≤ 0,8 · $S_r$                             |
| Switching element function       |           | N.O.  |
| Repeat accuracy                  | R         | ≤ 0,1 · $S_r$                                       |
| Differential travel (hysteresis) | H         | ≤ 0,2 · $S_r$                                       |
| Frequency of operating cycles    | f         | ≈ 25 Hz   |
| Rate operational voltage         | $U_e$     | 12 V - 48 V DC                                      |
| Operational voltage range        | $U_B$     | 10 V - 60 V DC                                      |
| Rated insulation voltage         | $U_i$     | 75 V DC   |
| Rated impulse withstand voltage  | $U_{imp}$ | 500 V   |
| Voltage drop                     | $U_d$     | < 3 V DC  |
| Utilization category             |           | DC-13   |
| Rated operational current        | $I_e$     | 200 mA DC   |
| Minimum operational current      | $I_m$     | 1 mA DC   |
| Off-state current                | $I_r$     | ≤ 0,5 mA DC   |
| No-load supply current           | $I_o$     | ≤ 20 mA DC  |
| Switching element                |           | permanent overload and s.c.p.                       |
| Short-circuit protection         |           | pulsed  |
| False polarity protection        |           | yes   |
| Time delay before availability   | $t_v$     | ≤ 50 ms   |

**Mechanical Data**

|                         |  |
|-------------------------|--|
| Enclosure               | Brass, nickel plated   |
| Front cap               | PTFE   |
| End cap                 | PA6.6, black   |
| Ambient air temperature | -25 °C ... +70 °C  |
| Type of protection      | IP65   |
| Pollution degree        | 3 (Pollution of the active zone can cause impairments of the operating distances.) |
| Indication              | Power ON = LED green<br>Output ON = LED yellow                                     |
| Termination type        | Plug connection M12x1  |
| For attachment          | Hexagon nut, brass, nickel plated  |

**Product reliability (in acc. with DIN EN 61709 (SN 29500))**

|                 |             |
|-----------------|-------------|
| MTTF (at 40 °C) | > 580 years |
|-----------------|-------------|

**EU Conformity**

acc. to directive 2014/30/EU (EMC-Directive)