


Female plug Locking device Series GDK

Description **AN-KAB.SHS 5M AC GERADE**

Article number **3251103234**

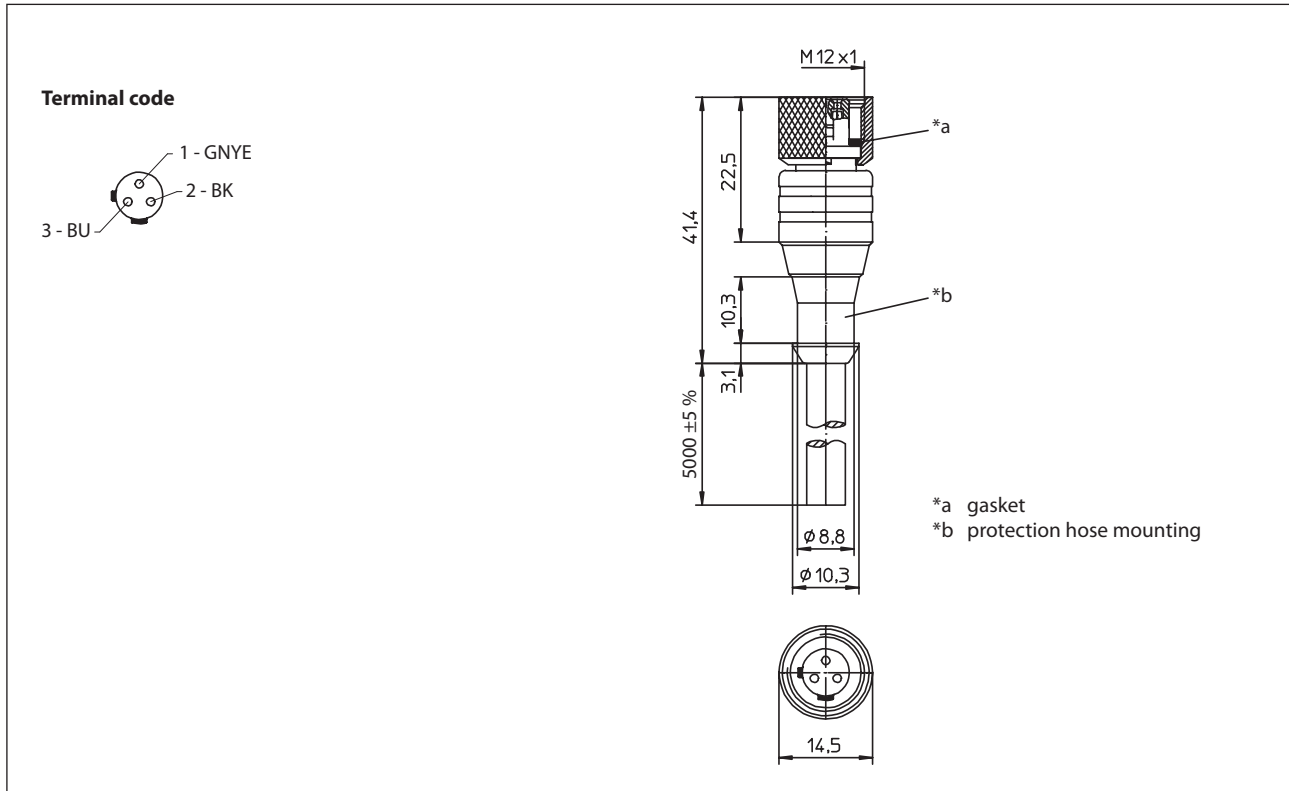

Electrical Data

Number of pole	3
Operating voltage	230 V AC
Current load	3A (at 70 °C; acc. to VDE 0891 part 1, chapter 7.2)
Contact resistance	≤ 200 mΩ (acc. to IEC 512 part 2)
Isolation resistance	≥ 10 ⁹ Ω (acc. to IEC 512 part 2)

Mechanical Data

Contact carrier / molded body	PUR
Knurled nut	brass, nickel-plated, with screw locking device
Type of protection	IP 67 (only in fully locked position with its plug)
Temperature	when cable is fix mounted: -25 °C ... +90 °C when cable can be moved: +5 °C ... +85 °C
Control cable	3 x 0,5 mm ² , PVC-Outer-jacket

Notes

The molded body allows a later mounting of a protection hose.