


**Equipments**  
Series Foot-switch

|                                         |                                  |
|-----------------------------------------|----------------------------------|
| Description <b>NOT-AUS UN-HAUBE SET</b> | Article number <b>3996000275</b> |
|-----------------------------------------|----------------------------------|

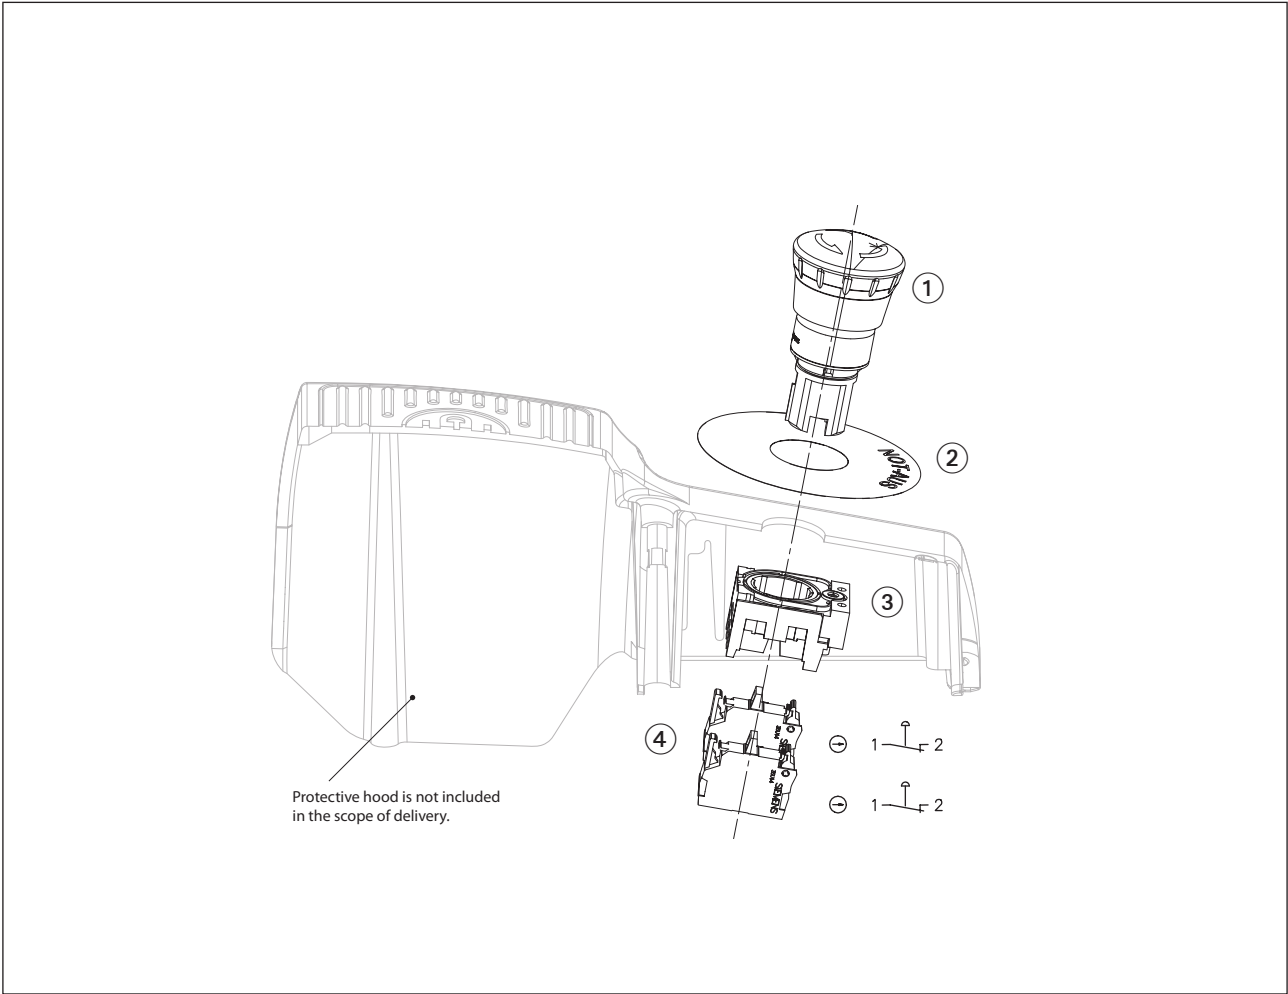

| Components                   | Quantity |
|------------------------------|----------|
| ① Emergency Stop push button | 1        |
| ② Emergency stop label       | 1        |
| ③ Holder                     | 1        |
| ④ Contact module             | 2        |

| Electrical Data           |                                                                                   |          |
|---------------------------|-----------------------------------------------------------------------------------|----------|
| Rated insulation voltage  | $U_i$                                                                             | 500 V AC |
| Conv. thermal current     | $I_{the}$                                                                         | 10 A     |
| Rated operational voltage | $U_e$                                                                             | 230 V    |
| Utilization category      | AC-15 $U_e / I_e$ 230 V AC / 6 A                                                  |          |
| Direct opening action     |  | yes      |

| Mechanical Data                       |                                                                                                        |
|---------------------------------------|--------------------------------------------------------------------------------------------------------|
| Emergency Stop push button            | Metal with plastic actuating element; positive latching, according to DIN EN ISO 13850; rotary release |
| Contact type                          | per contact module 1 N.C.                                                                              |
| Mechanical life                       | $3 \times 10^5$ switching cycles                                                                       |
| Conductor cross sections              | 1,0 – 1,5 mm <sup>2</sup> (solid wire) or<br>0,5 – 1,5 mm <sup>2</sup> (stranded wire with ferrules)   |
| Protection type acc. to IEC/EN 609529 |                                                                                                        |
| Emergency Stop push button (①)        | IP66, IP67, IP69 (IP69K)                                                                               |
| Contact module (④)                    | Enclosure IP40                                                                                         |
| Connection terminal                   | IP20                                                                                                   |

| Standards        |
|------------------|
| DIN EN 60947-5-1 |

| EU Conformity                                        |
|------------------------------------------------------|
| acc. to directive 2014/35/EU (Low-Voltage-Directive) |