


Cable Coupling

Series M12x1 with lock nut

Description **GDK-M12US/W00-2**

Article number **4139100801**

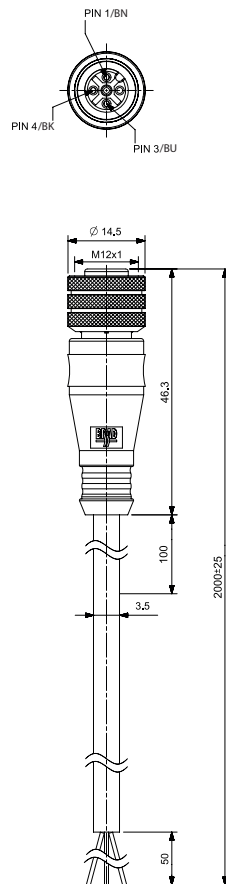

Electrical Data

Nominal voltage	250 V AC/DC
Rated current	4 A

Mechanische Daten		
Number of contacts	IEC 947-5-2	3
Protection type	IEC 60 529	IP67 (with snap fitting)
Materials	Contacts	CuSn
	Contacts plating	Au/Ni
	Dielectric material	PUR
	Housing (overmold.)	PUR, black
	Gasket	FPM
	Lock nut	CuZn/Ni
	Cable outer jacket	PVC, black (Ø 5,0 mm)
Lead		0,34 mm ²
Flammability	UL 94	
insert, moulded plug, housing cable		UL2464/1729
Temperature range		-25 °C ... +85 °C

Notes	
Self securing coupling nut.	