


Plastic bodied limit switch Series C74

Description C74-A2Z	Article number 6006801143
----------------------------	----------------------------------

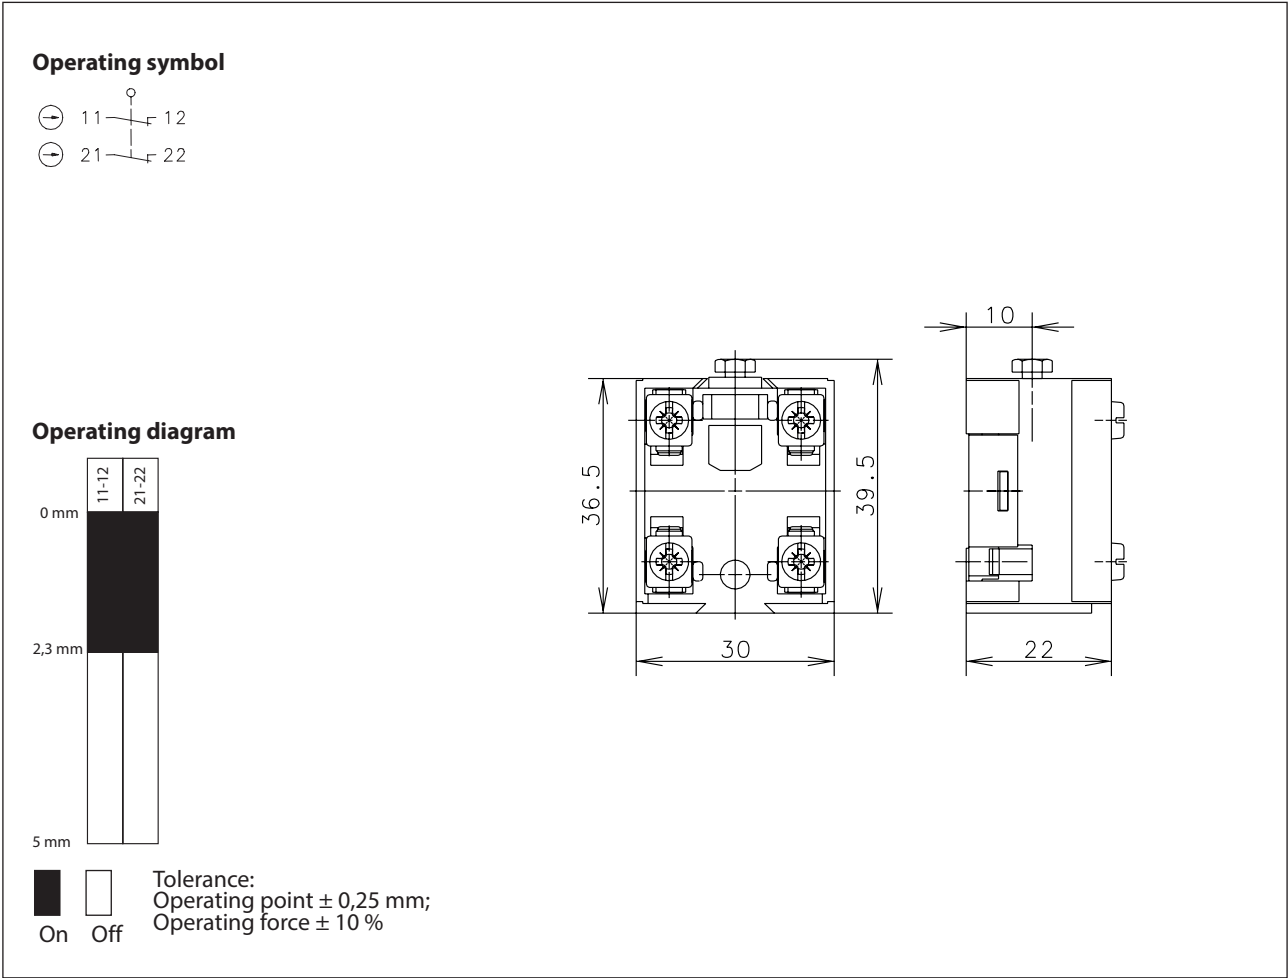

Electrical Data			
Rated insulation voltage	U_i	400 V AC	
Conv. thermal current	I_{the}	10 A	
Rated operational voltage	U_e	240 V	
Utilization category		AC-15, U_e/I_e 240 V / 3 A	
Direct opening action		acc. IEC/EN 60947-5-1, annex K	
Short-circuit protective device		Fuse 10 A gG	

Mechanical data	
Enclosure	Thermoplastic, glass fibre reinforced (UL 94-V0)
Actuator	Hexagon head screw M3
Ambient air temperature	-30 °C ... +80 °C
Contact type	2 N.C. (Zb)
Mechanical life	10 x 10 ⁶ operating cycles
Switching frequency	≤ 100 / min.
Assembly	2 x M3
Connection	4 screw connections (M3,5)
Conductor cross-sections	Solid: 0,5 ... 1,5 mm ² or Litz wire with ferrules: 0,5 ... 1,5 mm ²
Weight	≈ 0,06 kg
Installation position	operator definable
Protection type	IP00 nach EN 60529

Actuation
The push bolt actuator is mainly intended to be actuated along its axis.

Standards
DIN EN 60947-5-1

EU Conformity
acc. to directive 2014/35/EU (Low-Voltage-Directive)

Notes
Because of the open construction of the device there is no special protection against ingressing of water and touching parts under voltage.