Accessories
Connecting cable

Description **SFW-M12C4/AW-0,5PU**	Article number **6075689090**

Pin assignment



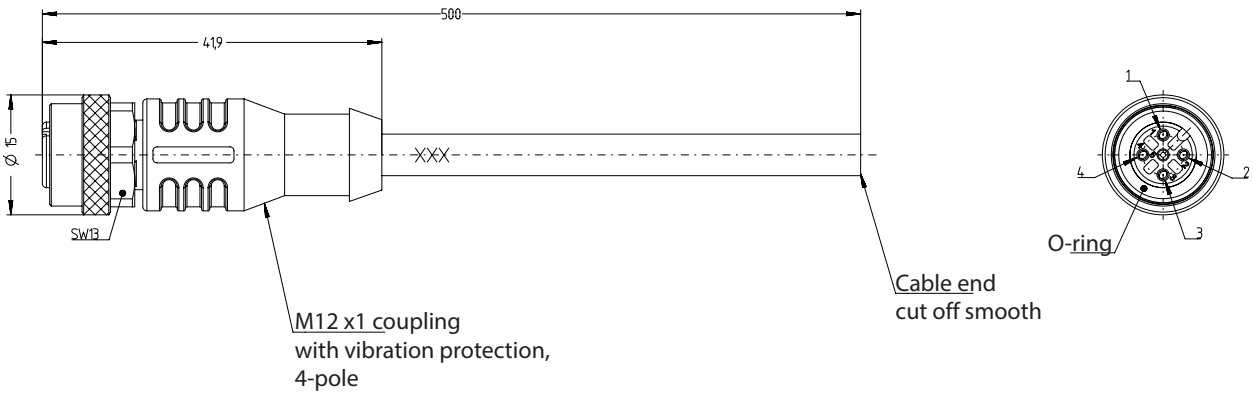

Electrical Data	
Operating voltage	max. 250 V
Current rating	4 A at 40 °C
Insulation resistancw	≥100 MΩ

Mechanical Data	
Connection	M12x1, 4-pole (A-Coded, female)
Cable	LiF9YH-11YH 4 x 0,34 mm² x 0,5 m +20 mm, outer-jacket PUR UL, black
Overmolding	TPU
Ambient temperature	-30 °C ... +90 °C
Degree of pollution	3
Type of protection	IP68 (only in fully snapped-in position with it's plugs)

EU Conformity	
	acc. to directive 2014/35/EU (Low-Voltage-Directive)
	acc. to directive 2011/65/EU (RoHS-Directive)