


Safety Controller Series SCx

Description **SCx-B-26-2T-5**

Article number **6075731212**

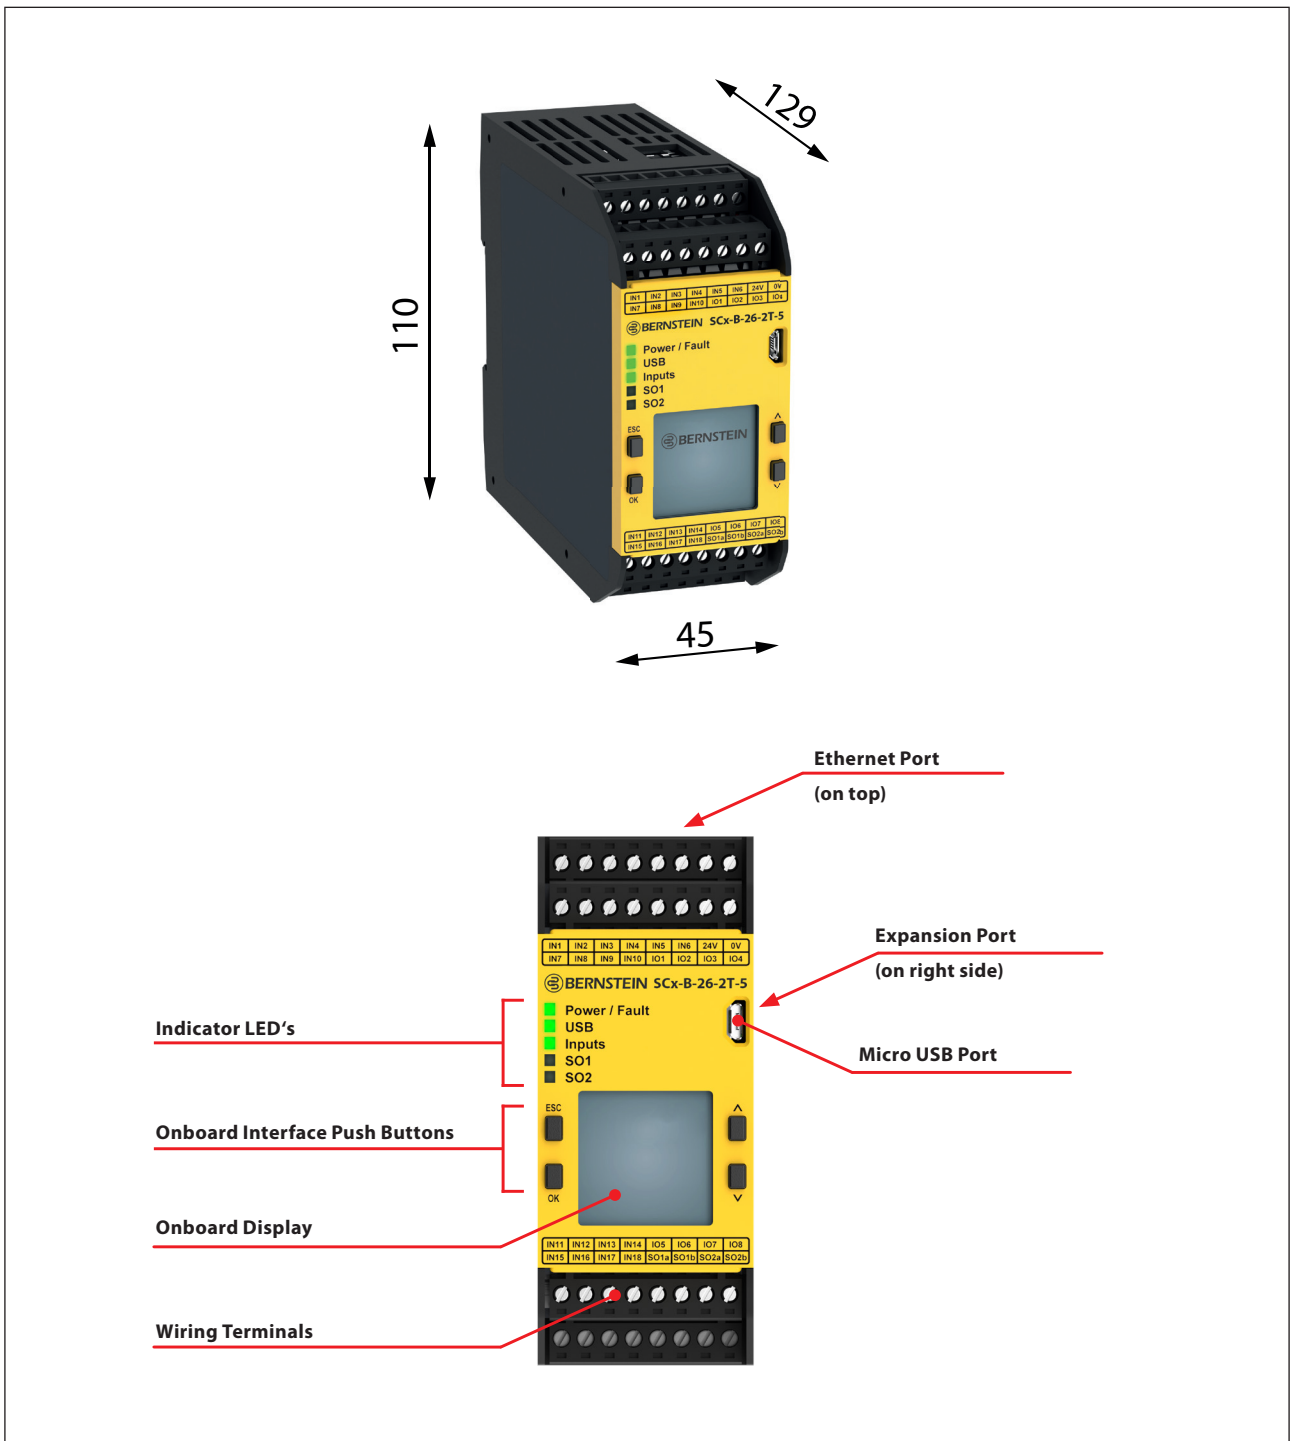

Electrical Data					
Sourcing voltage	<table> <tr> <td>Voltage</td> <td>24 V DC \pm 20 % (incl. ripple)</td> </tr> <tr> <td>Current</td> <td>100 mA no load</td> </tr> </table>	Voltage	24 V DC \pm 20 % (incl. ripple)	Current	100 mA no load
Voltage	24 V DC \pm 20 % (incl. ripple)				
Current	100 mA no load				
Convertible E/A	<table> <tr> <td>Sourcing current</td> <td>\leq 80 mA (overcurrent protection)</td> </tr> <tr> <td>Test Pulses</td> <td>1 ms every 25 to 75 ms</td> </tr> </table>	Sourcing current	\leq 80 mA (overcurrent protection)	Test Pulses	1 ms every 25 to 75 ms
Sourcing current	\leq 80 mA (overcurrent protection)				
Test Pulses	1 ms every 25 to 75 ms				
Safety Inputs (and Convertible E/A when used as inputs)					
Input On threshold	$>$ 15 V DC (guaranteed on) \leq 30 V DC				
Input Off threshold	$<$ 5 V DC and $<$ 2 mA, -3 V DC min.				
Input On Current	5 mA typical at 24 V DC, 50 mA peak contact cleaning current at 24 V DC				
Input lead resistance	300 Ω maximum (150 Ω per lead)				
Input requirements for a 4-wire Safety Mat	<ul style="list-style-type: none"> · Maximum capacity between plates: 0,22 μF¹ · Maximum capacity between bottom plate and ground: 0,22 μF¹ · Maximum resistance between the 2 input terminals of one plate: 20 Ω 				
Response and recovery times					
Response time (from the end of the input to the switching off the output):	see configuration overview in the software, as this may vary				
Recovery time input (stop until start):	250 ms typical, 400 ms max				
Timeout function for virtual input (muting activation and on/off):	RPI + 200 ms typical				
Timeout function for virtual input (manual reset and abort delay):	For details, refer to Virtual non-safety related input devices (SCx) in the Operation Manual.				
Delay Tolerance	\pm (0,02% + 2 scan times)				
Solid-state safety outputs	0,5 A max. at 24 V DC (1,0 V DC max. drop), 1 A max. inrush				
Output OFF threshold	1,7 V DC typical (2,0 V DC max.)				
Output leakage current	50 μ A max. with open 0 V				
Load	max. 0,1 μ F, max. 1 H, max. 10 Ω per line				
Network interface	Ethernet 10/100 Base-T/TX, modular RJ45 connection Selectable automatic negotiation or manual rate and duplex Auto MDI/MDIX (Auto-Cross)				
Protocols	Modbus [®] TCP, PROFINET [®] and EtherCAT [®] (requires SCx-N-Cat gateway)				
Data	256 virtual status outputs; error diagnostic codes and messages; access to error log				

Mechanical Data									
Operating Conditions	<table> <tr> <td>Temperature</td> <td>0 $^{\circ}$C to +55 $^{\circ}$C</td> </tr> <tr> <td>Storage Temperature</td> <td>-30 $^{\circ}$C to +65 $^{\circ}$C</td> </tr> <tr> <td>Humidity</td> <td>90 % at +50 $^{\circ}$C maximum relative humidity (non-condensing)</td> </tr> <tr> <td>Operating Altitude</td> <td>2000 m maximum (6562 ft maximum)</td> </tr> </table>	Temperature	0 $^{\circ}$ C to +55 $^{\circ}$ C	Storage Temperature	-30 $^{\circ}$ C to +65 $^{\circ}$ C	Humidity	90 % at +50 $^{\circ}$ C maximum relative humidity (non-condensing)	Operating Altitude	2000 m maximum (6562 ft maximum)
Temperature	0 $^{\circ}$ C to +55 $^{\circ}$ C								
Storage Temperature	-30 $^{\circ}$ C to +65 $^{\circ}$ C								
Humidity	90 % at +50 $^{\circ}$ C maximum relative humidity (non-condensing)								
Operating Altitude	2000 m maximum (6562 ft maximum)								
Protection class	IP20 (NEMA 1), for use in enclosures to IP54 (NEMA 3) or higher								
Mechanical Stress									
Shock	15 g for 11 ms, half sine, 18 shocks total (per IEC 61131-2)								
Vibration	3,5 mm occasional / 1,75 mm continuous at 5 Hz to 9 Hz, 1,0 g occasional and 0,5 g continuous at 9 Hz to 150 Hz: all at 10 sweep cycles per axis (per IEC 61131-2)								


Supply Wiring (AWG)	Required Overcurrent Protection (Amps)
0,50/20	5,0
0,32/22	3,0
0,20/24	2,0
0,13/26	1,0
0,08/28	0,8
0,05/30	0,5

Overcurrent protection is required to be provided by end product application per the supplied table.
 Overcurrent protection may be provided with external fusing or via Current Limiting, Class 2 Power Supply.
 Power supply wires < 0,20mm² (24 AWG) must not be connected.
 For additional product support, go to www.bernstein.eu.

Standards
EN ISO 12100
ISO 13857
ISO13850
EN 574
IEC6206
EN ISO 13849-1
ISO 13855
ISO 14119
EN 60204-1
IEC 61496
IEC 60529
IEC 60947-1
IEC 60947-5-1
IEC 60947-5-5
IEC 61508
IEC 62046

Safety Ratings
Category 4, PL e (EN ISO 13849)
SIL CL 3 (IEC 62061, IEC 61508)

Safety characteristics	
PFH (1/H)	1,05 x 10 ⁻⁹
Proof Test Interval	20 years

EU-Conformity
according to directive 2006/42/EG (Safety-of-Machinery-Directive)
according to directive 2014/30/EU (EMV-Richtlinie)
 2012/19/EU (EU-WEEE II); WEEE-Reg. No. DE 50560927

Approvals
cUL _{US}
PI (PROFIBUS PROFINET)