


# Safety Controller

## Series SCx

Description <b>SCx-O-4T</b>	Article number <b>6075773222</b>
-----------------------------	----------------------------------

### 4 Dual-channel solid-state safety output module

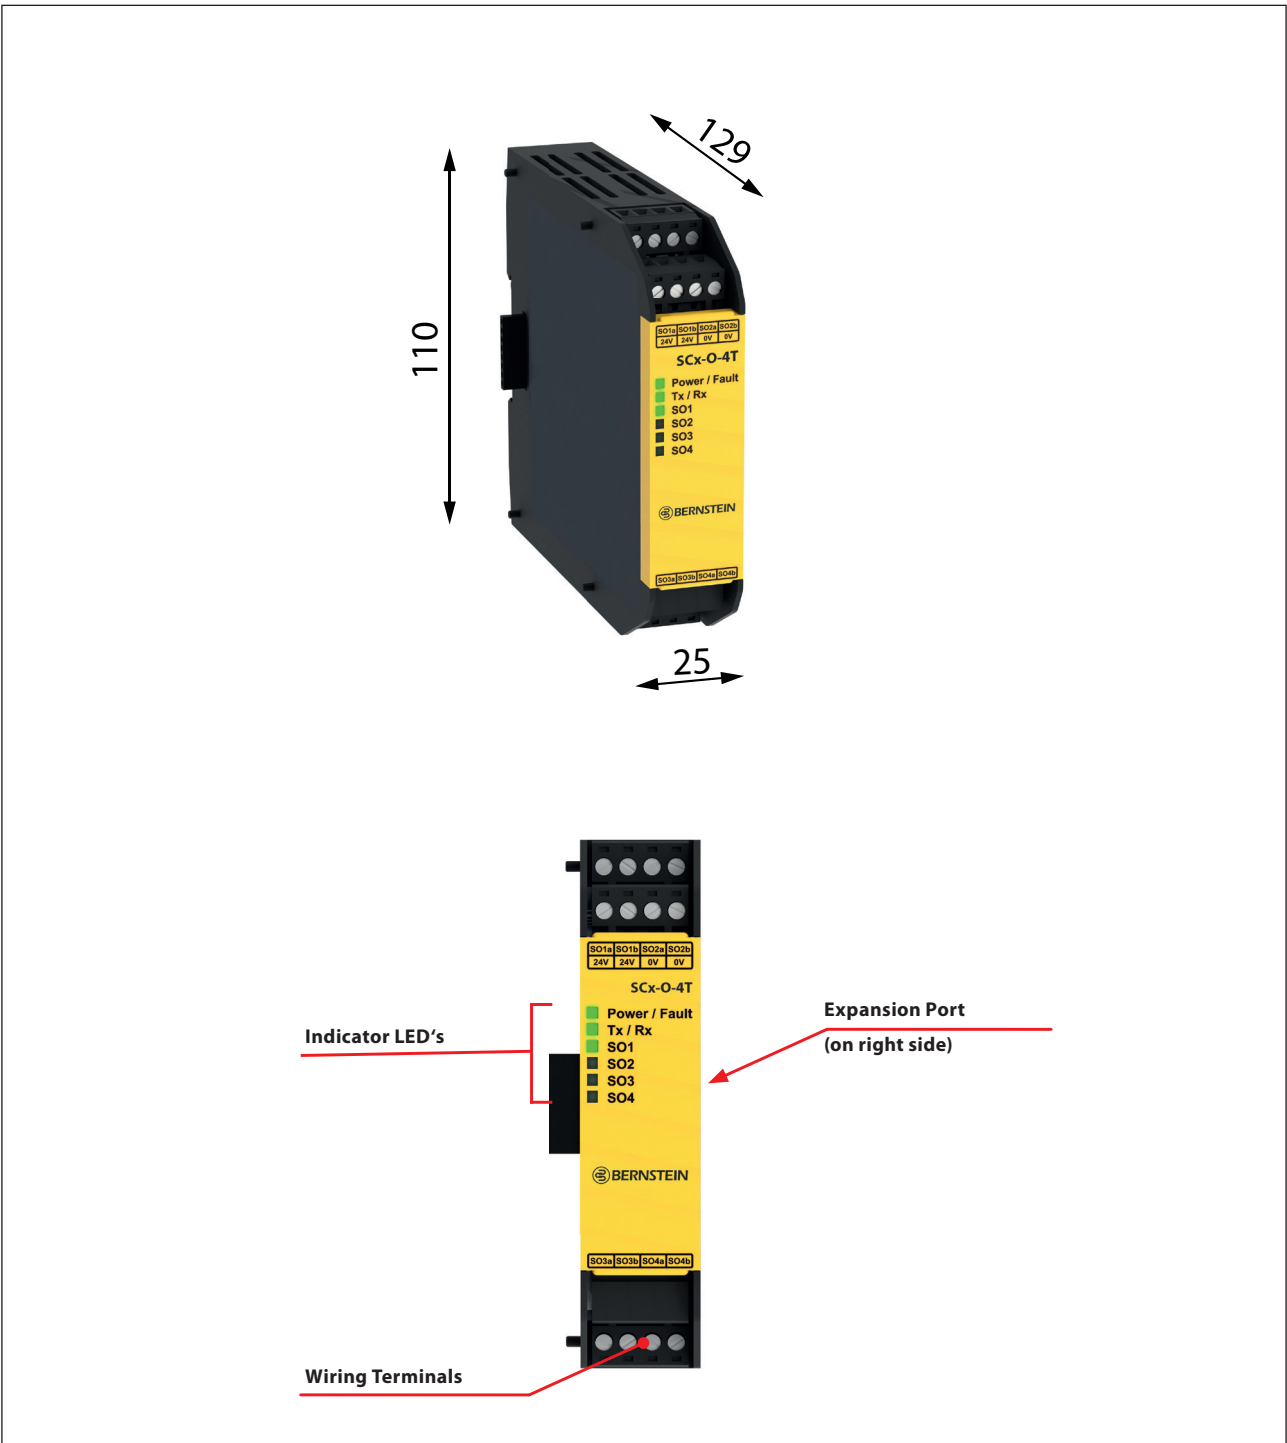

Electrical Data		
<b>Sourcing voltage</b>	Voltage	24 V DC ± 20 % (incl. ripple)
	Current	100 mA no load
<b>External power supply</b>	24 V DC ± 20% (including ripple); 0,1 A no-load, 4,1 A maximum load	
<b>BUS Current</b>	0,02 A	
<b>Solid-state safety outputs</b>	0,5 A max. at 24 V DC (1,0 V DC max. drop)	
<b>Test pulse</b>	Width	maximum 200 µs
	Rate	200 ms typical

Mechanical Data		
<b>Operating Conditions</b>		
Temperature	0 °C to +55 °C	
Storage Temperature	-30 °C to +65 °C	
Humidity	90 % at +50 °C maximum relative humidity (non-condensing)	
Operating Altitude	2000 m maximum (6562 ft maximum)	
<b>Protection class</b>	IP20 (NEMA 1), for use in enclosures to IP54 (NEMA 3) or higher	
<b>Mechanical Stress</b>		
Shock	15 g for 11 ms, half sine, 18 shocks total (per IEC 61131-2)	
Vibration	3,5 mm occasional / 1,75 mm continuous at 5 Hz to 9 Hz, 1,0 g occasional and 0,5 g continuous at 9 Hz to 150 Hz: all at 10 sweep cycles per axis (per IEC 61131-2)	


Supply Wiring (AWG)	Required Overcurrent Protection (Amps)
0,50/20	5,0
0,32/22	3,0
0,20/24	2,0
0,13/26	1,0
0,08/28	0,8
0,05/30	0,5

Overcurrent protection is required to be provided by end product application per the supplied table.  
 Overcurrent protection may be provided with external fusing or via Current Limiting, Class 2 Power Supply.  
 Power supply wires < 0.20mm<sup>2</sup> ( 24 AWG) must not be connected.  
 For additional product support, go to [www.bernstein.eu](http://www.bernstein.eu).

Standards	
	EN ISO 12100
	ISO 13857
	ISO13850
	EN 574
	IEC6206
	EN ISO 13849-1
	ISO 13855
	ISO 14119
	EN 60204-1
	IEC 61496
	IEC 60529
	IEC 60947-1
	IEC 60947-5-1
	IEC 60947-5-5
	IEC 61508
	IEC 62046

Safety Ratings	
	Category 4, PL e (EN ISO 13849)
	SIL CL 3 (IEC 62061, IEC 61508)

Safety characteristics	
PFH (1/H)	5,8 x 10 <sup>-10</sup>
Proof Test Interval	20 years

EU-Conformity	
	according to directive 2006/42/EG (Safety-of-Machinery-Directive)
	according to directive 2014/30/EU (EMV-Richtlinie)
	2012/19/EU (EU-WEEE II); WEEE-Reg. No. DE 50560927

Approvals	
	cUL <sub>US</sub>