

Accessories


Flange plug

Description **STECKER 5P M12/M20 A-COD**

Article number **6079000002**

Pin assignment

1	BN
2	WH
3	BU
4	BK
5	GY

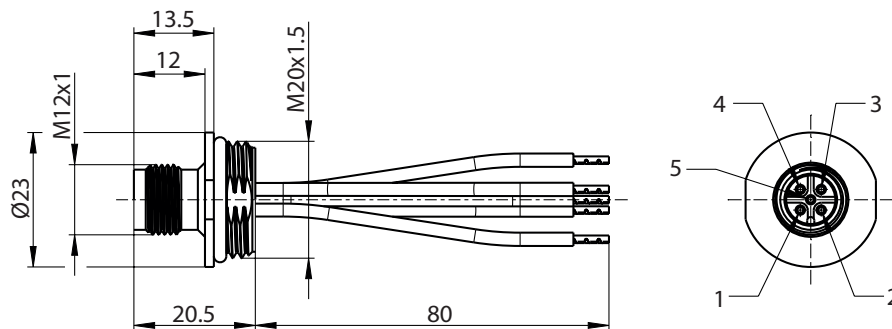

Electrical Data

Operating voltage	max. 60 V
Current rating	3 A at 40 °C
Insulation resistance	≥100 MΩ

Mechanical Data

Connection	M12x1, 5-pole (A-Coded)
stranded wire with ferrules	5 x H05V2-K, 0,5 mm², PVC
Material housing	PA (black)
Material contacts	CuZn (brass)
Contact surface	Au (gold)
Ambient temperature	-40 °C ... +80 °C
Degree of pollution	3
Type of protection	IP67 (only in fully snapped-in position with it's plugs)

Note

Attention: For technical reasons, the 5-pin version of the built-in plug has a rated voltage of 60 volts.
This means that the rated voltage is reduced to 60 volts after installation of the built-in plug in a switch designed for voltages greater than 60 volts!
It is not permitted to operate the switch with voltages higher than 60 volts.