


Plastic bodied limit switch
Series C74

Description C74-RAST-SU1Z/A2Z	Article number 6106001152
--------------------------------------	----------------------------------

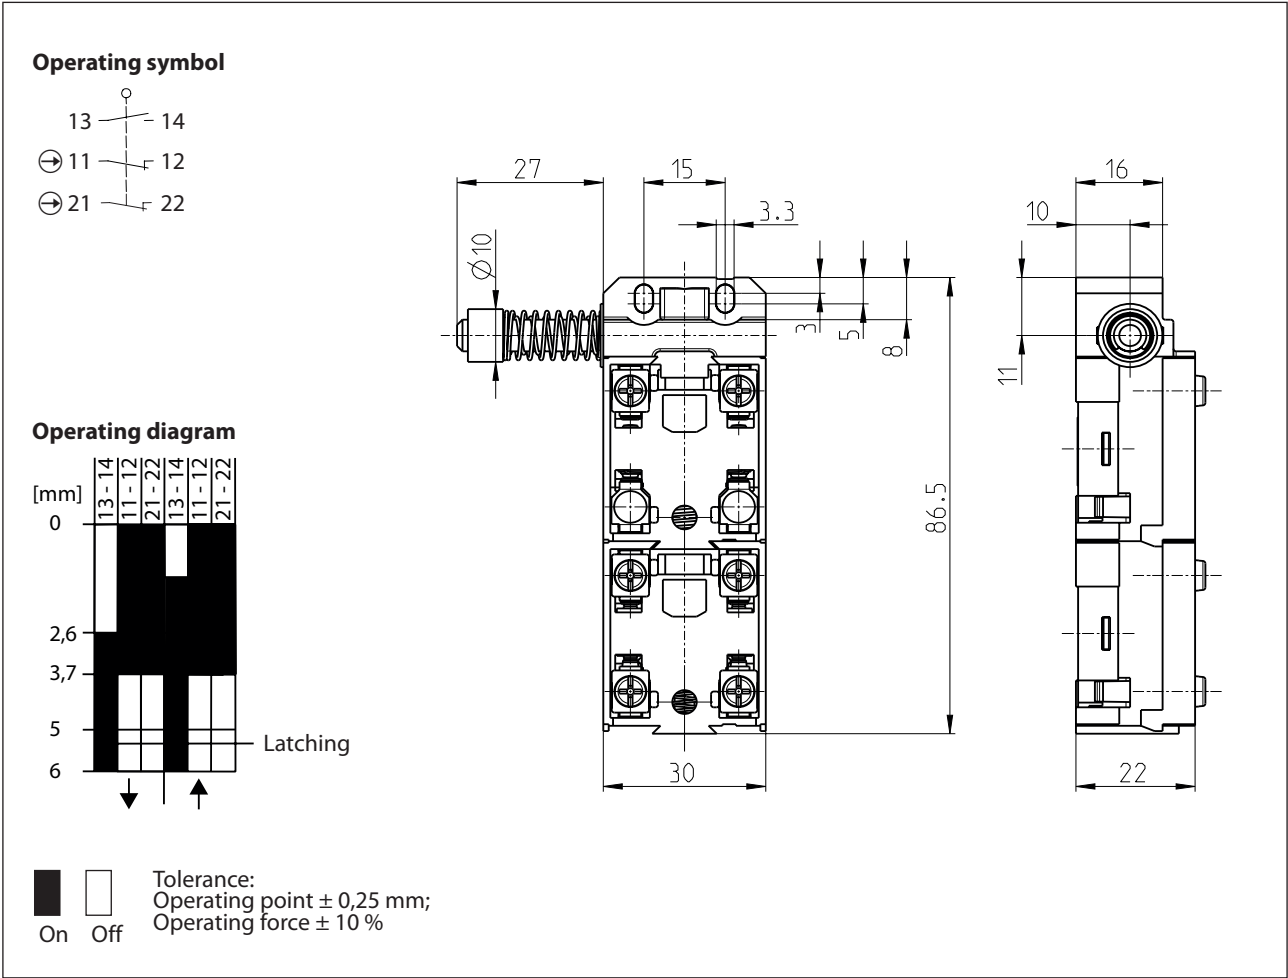

Electrical Data		
Rated insulation voltage	U_i	400 V AC
Conv. thermal current	I_{the}	10 A
Rated operational voltage	U_e	240 V
Utilization category	AC-15, U_e/I_e 240 V / 3 A	
Direct opening action	⊕	acc. IEC/EN 60947-5-1, annex K
Short-circuit protective device	Fuse 2 A gG	

Mechanical data	
Enclosure	Thermoplastic, glass fibre reinforced (UL 94-V0)
Actuator	Plunger inside located, Ø8
Ambient air temperature	-30 °C ... +80 °C
Contact type	2 N.C., 2 N.O. (Zb); with latching
Mechanical life	
without actuation of the latch	10 x 10 ⁶ operating cycles
with actuation of the latch	1 x 10 ⁶ operating cycles
Switching frequency	≤ 100 / min.
Assembly	2 x M3
Connection	6 screw connections (M3,5)
Conductor cross-sections	0,5 – 1,5 mm ² (solid or stranded wire with ferrules)
Weight	≈ 0,07 kg
Installation position	operator definable
Protection type	IP00 nach EN 60529

Actuation
The push bolt actuator is mainly intended to be actuated along its axis.

Standards
DIN EN 60947-5-1

EU Conformity
acc. to directive 2014/35/EU (Low-Voltage-Directive)

Notes
Because of the open construction of the device there is no special protection against ingessing of water and touching parts under voltage.