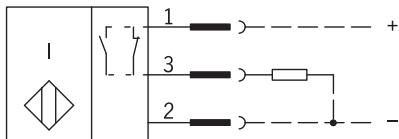


## Inductive Proximity Switch

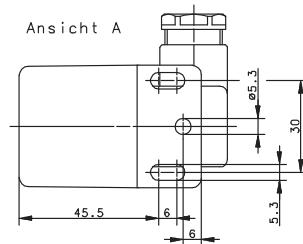

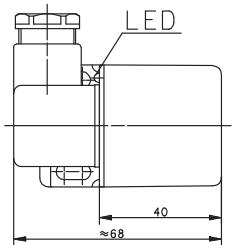

### Series N40

Description KIN-N40PP/015-KLSD

Article number 6502982001

**Wiring Diagram**

The PNP normally-open or PNP normally-closed function can be selected via an integrated switch.

**Identifying characteristics in accordance with EN 60947-5-2**

Electrical data		
Rated operating distance	$S_n$	15 mm
Standard target		45 mm x 45 mm, t = 1 mm; Material: FE360
Real sensing distance	$S_r$	13,5 ... 16,5 mm
Assured operating distance	$S_a$	0 ... 12,2 mm
Switching element function		programmable, DC
Repeat accuracy	R	$\leq 5\%$
Differential travel (hysteresis)	H	$\approx 10\%$
Operational voltage range	$U_B$	10 - 60 V DC
Rated insulation voltage	$U_i$	75 V DC
Rated impulse withstand voltage	$U_{imp}$	500 V
Voltage drop	$U_d$	$\leq 2,5\text{ V}$
Utilization category		DC-13
Rated operational current	$I_e$	400 mA
Off-state current	$I_r$	$< 0,1\text{ mA}$
No-load supply current	$I_0$	$< 8\text{ mA}$
Switching element		Permanent overload and s.c.p.
Short-circuit protection		pulsed
Frequency of operating cycles	f	100 Hz
Mounting		non flush
False polarity protection		yes
Time delay before availability	$t_v$	$\leq 50\text{ ms}$

**Electromagnetic compatibility (EMC)**

Electromagnetic field test	IEC 61000-4-3
Electrostatic discharge test	IEC 61000-4-2
Electrical fast transient immunity test	IEC 61000-4-4
Radiated disturbance field strength	EN 55011

**Mechanical Data**

Enclosure	PA 6, red
Ambient air temperature	-25 °C ... +70 °C (plug: -30 °C .... +120 °C)
Type of protection	IP65 (only in fully locked position with it's plugs)
Pollution degree	3 (Pollution of the active zone can cause impairments of the operating distances.)
Indication	LED yellow
Termination type	Connection in dependence on DIN EN 175301-803

**EU Conformity**

acc. to directive 2004 / 108 / EC