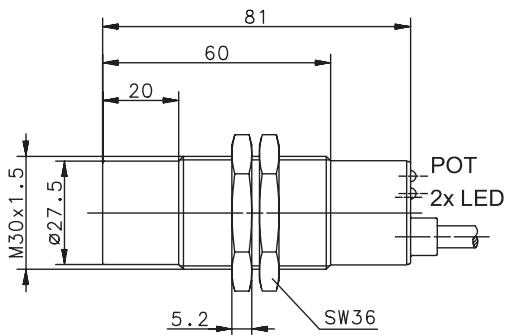
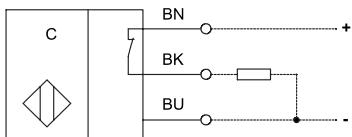


Capacitive Proximity Switch

Series M30

Description KCN-T30PÖ/020-KLP2

Article number 6507723001

Wiring Diagram**Identifying characteristics in accordance with EN 60947-5-2**

Electrical data	
Rated operating distance	S_n 20 mm
Mounting	non flush
Standard target	3-Sn x 3-Sn x 1 mm; material: steel; connected to earth
Effective operating distance	S_r 5-20 mm; Sr adjustable via potentiometer (POT). Clockwise rotation increases sensitivity, Turning to the left reduces the sensitivity
Assured operating distance	S_a $0 \leq S_a \leq 0,8 \cdot S_r$
Switching element function	N.C.
Repeat accuracy	R $\leq 0,1 \cdot S_r$
Differential travel (hysteresis)	H $\leq 0,2 \cdot S_r$
Frequency of operating cycles	f ≈ 25 Hz
Rate doperational voltage	U_e 12 V - 48 V DC
Operational voltage range	U_B 10 V - 60 V DC
Rated insulation voltage	U_i 75 V DC
Rated impulse withstand voltage	U_{imp} 500 V
Voltage drop	U_d < 3 V DC
Utilization category	DC-13 (Switching element)
Rated operational current	I_e 400 mA DC
Minimum operational current	I_m 1 mA DC
Off-state current	I_r $\leq 0,5$ mA DC
No-load supply current	I_o ≤ 20 mA DC
Switching element	permanent overload and s.c.p.
Short-circuit protection	pulsed
Rated supply frequency	DC
False polarity protection	with permutation of +, -, output no damage occurs
Time delay before availability	t_v < 50 ms

Mechanical Data

Enclosure	PBT, black
End cap	PA6.6, black
Ambient air temperature	-25 °C ... +70 °C
Type of protection	IP67
Pollution degree	3 (Pollution of the optic can cause impairments of the operating distances.)
Indication	Power ON = LED green Output ON = LED yellow
Termination type	Cable 3 x 0,5 mm ² x 2 m, PVC-outer jacket black
For attachment	Hexagon nut, PA6.6, black

EU Conformity

acc. to directive 2014/30/EU (EMC-Directive)