


Capacitive Proximity Switch Series M30

Description **KCN-T30PS/020-KLPS12V**

Article number **6507923006**

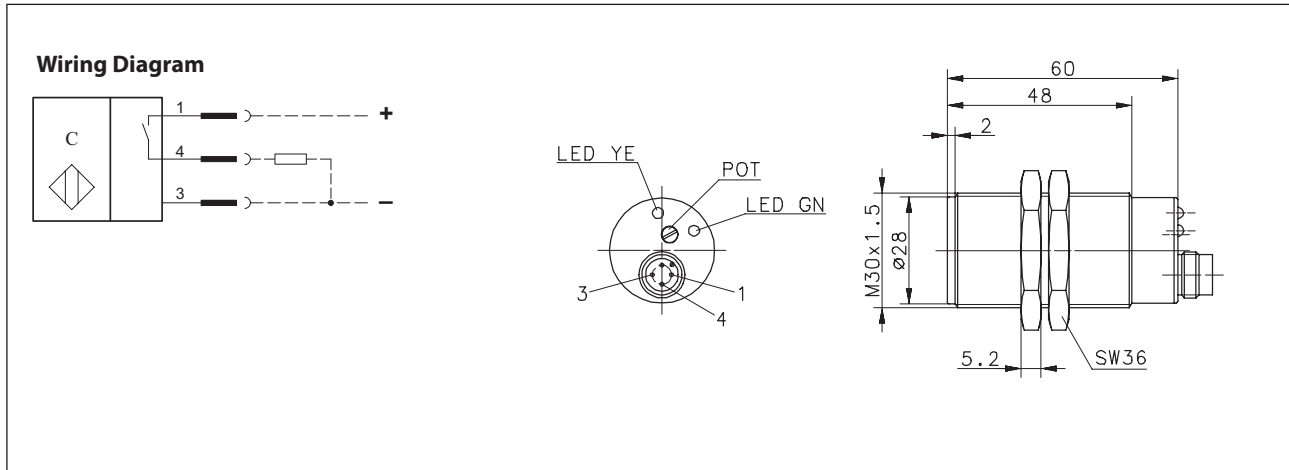

Identifying characteristics in accordance with EN 60947-5-2

Electrical data		
Rated operating distance	S_n	20 mm
Mounting		non flush
Standard target		60 mm x 60 mm x 1 mm; material: steel; connected to earth
Effective operating distance	S_r	5 ... 20 mm (adjustable with potentiometer (POT); turn right $\hat{=}$ high sensitivity, turn left $\hat{=}$ low sensitivity)
Assured operating distance	S_a	$0 \leq S_a \leq 0,8 \times S_r$
Switching element function		DC N.O.
Repeat accuracy	R	$\leq 0,1 \times S_r$
Differential travel (hysteresis)	H	$\leq 0,2 \times S_r$
Frequency of operating cycles	f	≈ 25 Hz
Rate doperational voltage	U_e	12 V - 48 V DC
Operational voltage range	U_B	10 V - 60 V DC
Rated insulation voltage	U_i	75 V DC
Rated impulse withstand voltage	U_{imp}	500 V
Voltage drop	U_d	< 3 V
Utilization category		DC 13 (switch element)
Rated operational current	I_e	400 mA DC
Minimum operational current	I_m	≥ 1 mA DC
Off-state current	I_r	$\leq 0,5$ mA DC
No-load supply current	I_o	< 20 mA DC
Switching element		Permanent overload and s.c.p.
Short-circuit protection		pulsed
False polarity protection		yes
Time delay before availability	t_v	≤ 50 ms

Mechanical Data	
Enclosure	PBT, black
End cap	PA6.6, black
Ambient air temperature	-25 °C ... +70 °C
Type of protection	IP67 nach EN 60529 (nur im gesteckten Zustand mit den dazugehörigen Gegenstücken)
Pollution degree	3 (Pollution of the active zone can cause impairments of the operating distances.)
Indication	Power ON = LED green Output ON = LED yellow
Termination type	M12x1 plug connector
For attachment	2 x Hexagon nut (PA6.6, black)

EU Conformity	
	acc. to directive 2014/30/EU (EMC-Directive)