


Inductive Proximity Switch

Series M08

Description KIN-M08PS/002-KLSM8I

Article number 6532942004

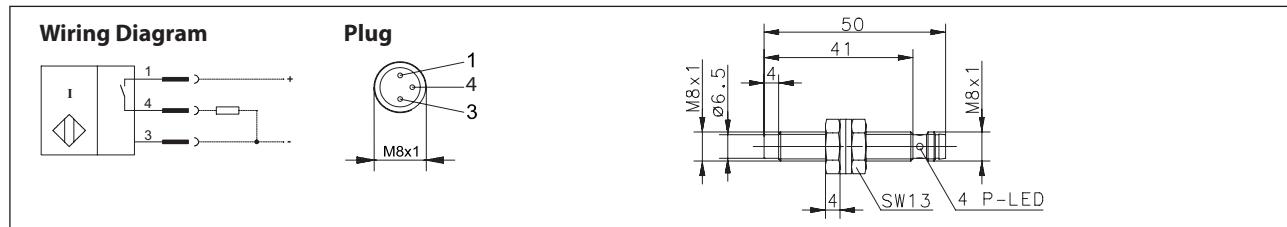

Identifying characteristics in accordance with EN 60947-5-2

Electrical data		
Sensor operation (delivery status)		
Rated operating distance S_n	2 mm	
Standard target	8 mm x 8 mm, t = 1 mm, material: FE360	
Real sensing distance S_r	1,8 ... 2,20 mm	
Assured operating distance S_a	0 ... 1,6 mm	
Switching element function	DC, N.O.	
Repeat accuracy R	$\leq 5\%$	
Differential travel (hysteresis) H	$\approx 8\%$	
Rated operational voltage U_e	12 - 24 V DC	
Operational voltage range U_B	10 - 30 V DC	
Rated insulation voltage U_i	75 V DC	
Rated impulse withstand voltage U_{imp}	500 V	
Voltage drop U_d	$\leq 2\text{ V}$ specification	
Utilization category	DC 13	
Rated operational current I_e	200 mA $\pm 10\%$	
Minimum operating current I_m	1 mA	
Off-state current I_r	$< 0,1\text{ mA}$	
No-load supply current I_o	$< 10\text{ mA}$	
Switching element	permanent overload and s.c.p.	
Short-circuit protection	pulsed, current-limited and thermal	
Frequency of operating cycles f	750 Hz	
Mounting	non flush	
False polarity protection	yes	
Time delay before availability t_v	$< 300\text{ ms}$	
IO-Link operation		
Rated operating voltage range U_B	18 – 30 V DC (typ. 24 V DC)	
Output	IO-Link	
Switching element function	N.O. / N.C. parameterizable	
Repeat accuracy R	$\leq 5\%$ from the end value, U_B and temperature at a constant level	
No-load supply current I_o	$< 15\text{ mA}$	
Serial output	Short-circuit proof	
False polarity protection	yes	

IO-Link specification

IO-Link Spec V 1.1	compliant (yellow LED)
Speed	COM 2 38,4 kBaud
Process data Device → Master	8 bit
cycle time	10 ms

Electromagnetic compatibility (EMC)**Sensor operation**

Electromagnetic field test	IEC 61000-4-3
Electrostatic discharge test	IEC 61000-4-2
Electrical fast transient immunity test	IEC 61000-4-4
Radiated disturbance field strength	EN 55011

IO-Link operation

acc. to EN 60947-5-7, EN 61131-9

Mechanical Data

Front cap	LCP, black
Enclosure	stainless steel (Niro 1.4305)
Ambient air temperature	-25 °C ... +70 °C
Type of protection	IP67 / NEMA Type 1 (only in fully locked position with its plugs)
Function indication	LED, yellow
Degree of pollution	3 (Pollution of the sensing surface may decrease operating distance)
Termination type	plug socket M8x1
For attachment	2 x hexagon nut (tightening torque ≤ 8 Nm) and 2 x toothed washer

Product reliability (in acc. with DIN EN 61709 (SN 29500))

MTTF (at 40 °C)	>1150 years
-----------------	-------------

EU Conformity

acc. to directive 2014/30/EU (EMC-Directive)

Approvals**Notes**

To be used with a class 2 power supply according to UL approval.

Further data and information can be found at www.berstein.eu.