



Inductive Proximity Switch

Series M12

Description **KIB-M12PS/004-KL5VE**

Article number **6602903148**

Wiring Diagram

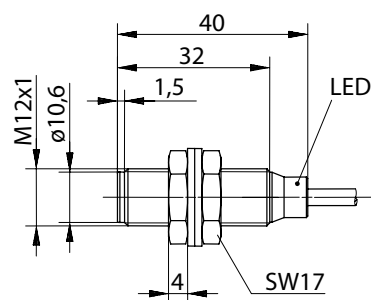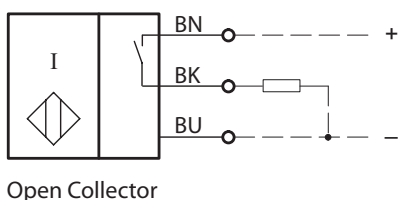

Identifying characteristics in accordance with EN 60947-5-2

Electrical data		
Rated operating distance	S_n	4 mm
Standard target		12 mm x 12 mm, t = 1 mm, material: FE360
Real sensing distance	S_r	3,6 ... 4,4 mm
Assured operating distance	S_a	0 ... 3,2 mm
Switching element function		DC, N.O.
Repeat accuracy	R	≤ 5 %
Differential travel (hysteresis)	H	≈ 10 %
Operational voltage range	U_B	10 - 36 V DC
Rated insulation voltage	U_i	75 V DC
Rated impulse withstand voltage	U_{imp}	500 V
Voltage drop	U_d	≤ 1,6 V
Utilization category		DC 13
Rated operational current	I_e	200 mA @ 20 °C
Minimum operating current	I_m	1 mA
Off-state current	I_r	< 0,1 mA
No-load supply current	I_o	≤ 11 mA
Switching element		permanent overload and s.c.p.
Short-circuit protection		pulsed
Frequency of operating cycles	f	800 Hz
Mounting		flush
False polarity protection		yes
Time delay before availability	t_v	≤ 100 ms

Mechanical Data	
Front cap	PA6.6, black
Enclosure	Brass, nickel plated
End cap	PC, transparent with translucent LED
Ambient air temperature	-25 °C ... +70 °C
Type of protection	IP67
Degree of pollution	3 (Pollution of the active zone can cause impairments of the operating distances)
Indication	Function indicator integrated in end cap
Termination type	Cable 3 x 0,14 mm ² x 5 m ±5 %; PVC-Outer jacket, black
For attachment	2 x hexagon nut and 2 x toothed washer

EU Conformity	
	acc. to directive 2014/30/EU (EMC-Directive)

Notes	
	Further data and information can be found at www.bernstein.eu .