


Float switch

Series Standard-Float switch



Description **MAA-723 KSS 0189**

Article number **6825105048**

Wiring diagram (non-actuated state)



Performance diagram

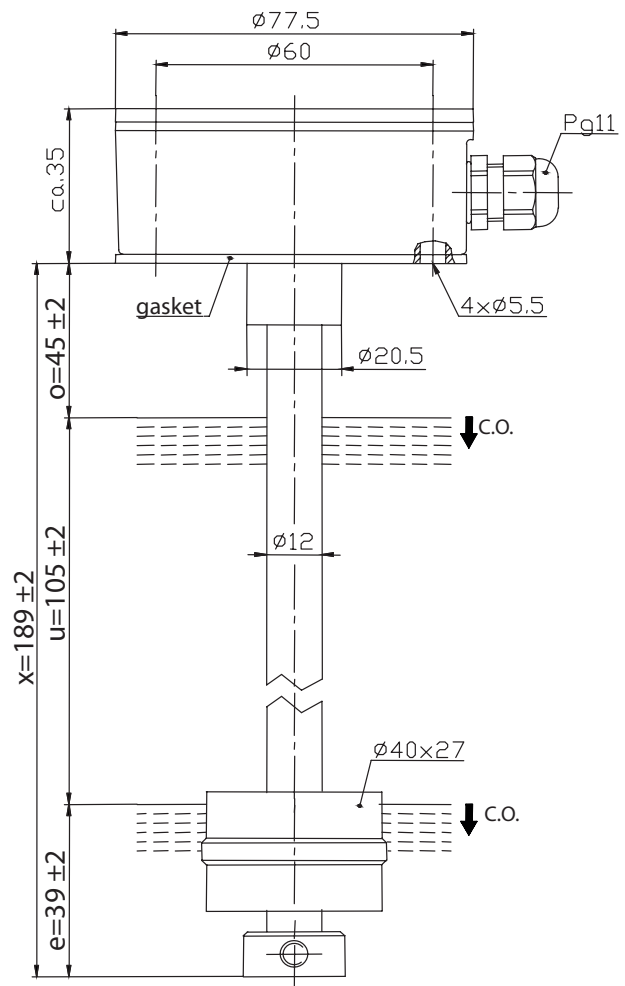

Electrical data






Rated voltage	U_r	250 V
max. switching current		0,5 A
max. switching capacity		30 VA
Rated insulation voltage	U_i	300 V AC
Bemessungsstoßspannungsfestigkeit	U_{imp}	2,5 kV AC
Overvoltage category		II
Switching element		2 C.O., falling level
Protection class		II (totally insulated)

Mechanical data	
Terminal box material	Aluminium coated RAL3016
Switching tube material	X6CrNiMoTi17-12-2 (1.4571)
Float material	POM
- density	about 0,7 g/cm ³ ±10 %
- depth of immersion	18 mm ± 2 mm (to a fluid-density of 1 g/cm ³)
Adjusting ring material	X6CrNiMoTi17-12-2 (1.4571)
Gasket material	NBR
Ambient air temperature	-5 °C to +60 °C
Liquid temperature	-5 °C to +60 °C
Connection	Connecting block inside the terminal box
Protection type	IP 65 acc to IEC529 / EN 60529
Max. pressure	10 bar

Standards
DIN EN 60947-5-1

EU Conformity
acc. to directive 2014/35/EU (Low-Voltage-Directive)

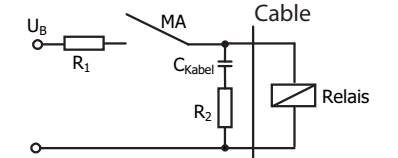General details
The measures of the switching points refer to a fluid-density of 1 g/cm³. The tolerance of the switching points is ±2 mm Pay attention to the contact protection, when switching inductive or capacitive loads. Maximum data must not be exceeded!

Inductive loads	
Direct current  Suppression of voltage peaks with a free-wheeling diode	Alternating voltage  Suppression of voltage peaks with a VDR
 Suppression of voltage peaks with an RC element	
Capacitive loads and lamp loads	
 Contact protection with resistors for limiting current	