
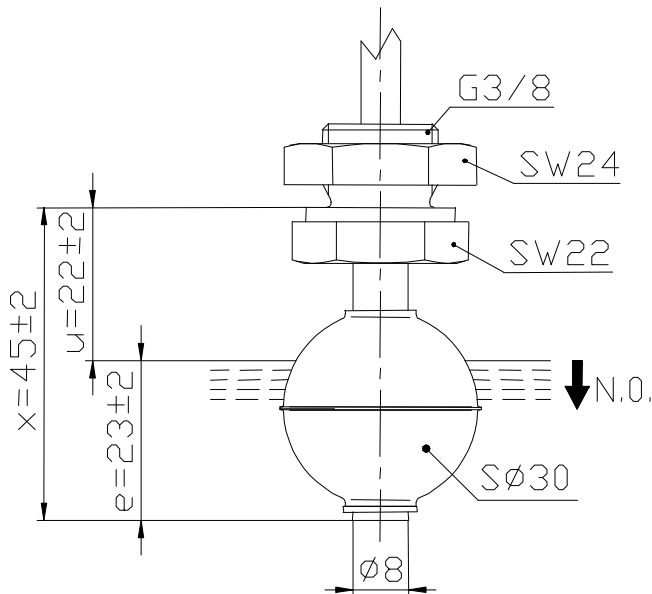


Mini-level float switches


Description **MSN1-NI-R3/8-S 0045**

Article number **6891173005**

Performance diagram
(maximum data)



Wiring diagram
(without liquid)



Electrical data

Reed contact	max. switching voltage	250 V
	max. switching current	0,5 A
	max. switching capacity	10 VA
	mechanical life	10 ⁷ to 10 ⁹ switches depending on the load
Switching element		1 normally open contact, falling level
Direction category		AC-21A and DC-21A acc. to DIN VDE 0660 T107
Standard		acc. to DIN VDE 0660 T200

Mechanical data

Screw connection material	X6CrNiMoTi17 12 2 (1.4571)	
Hexagon nut material	X10CrNiS18 9 (1.4305)	
Switching tube material	X6CrNiMoTi17 12 2 (1.4571)	
Float material	X6CrNiMoTi17 12 2 (1.4571)	
	-density	about 0,65 g/cm ³ ±10%
	-depth of immersion	18 mm ±2 mm (to a fluid-density of 1 g/cm ³)
Grip ring material	X35CrMo17 (1.4122)	
Ambient air temperature	-5°C to +150°C	
Liquid temperature	-5°C to +150°C	
Connection	1m cable, silicone, 2x0,50mm ² with cable end sleeves	
Protection type	IP 65 acc. to DIN VDE 0470 T1	
Max. pressure	15 bar	

General details

Repeatability of switching points is ±0,05mm based on the same geometrical conditions as of a switch device.
 The measures of the switching points refer to a fluid-density of 1 g/cm³.
 The tolerance of the switching points is ±2mm
 Pay attention to the contact protection, when switching inductive loads. Maximum data must not be exceeded!

Subject to change without notice.

Date of issue : 07.05.2008 / Page 1 of 1
 Document : 6891173005_en.doc / Last update : 1