


# Float switch

## Series Miniature-Float switch

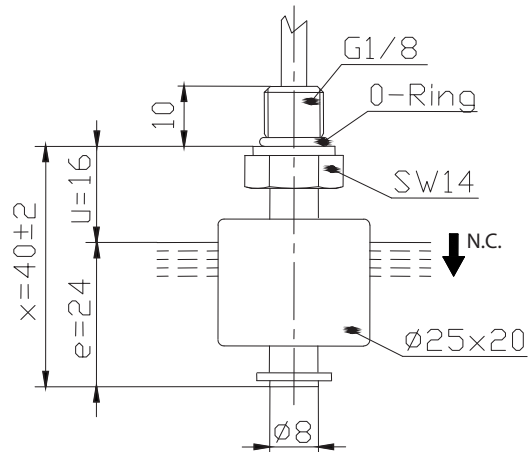
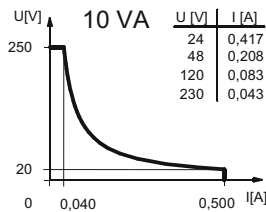
Description **MSK2-MS-R1/8-O 0040**

Article number **6891221002**

### Wiring diagram (non-actuated state)



### Performance diagram



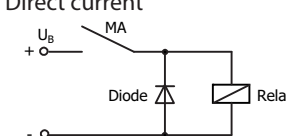
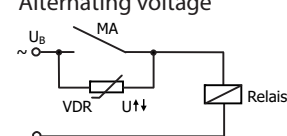
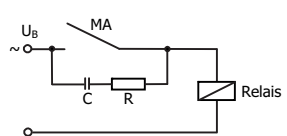
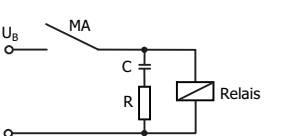
### Characteristic features in accordance with EN 60947-5-1

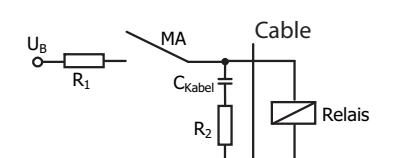


Electrical data	
max. switching voltage	250 V
max. switching current	0,5 A
max. switching capacity	10 VA
mechanical life	10 <sup>7</sup> to 10 <sup>9</sup> switches depending on the load
Switching element	1 N.C., falling level
Protection class	II (totally insulated)

Mechanical data	
Bolting material	CuZn39Pb3 (CW614N)
Switching tube material	CuZn37 (CW508L)
Float material	PVC
- density	about 0,7 g/cm <sup>3</sup> ±10 %
- depth of immersion	17 mm ± 2 mm ( to a fluid-density of 1 g/cm <sup>3</sup> )
Grip screw material	CuSn8 (CW453K)
Gasket material	NBR
Ambient air temperature	-5 °C to +60 °C
Liquid temperature	-5 °C to +60 °C
Connection	Cable 2 x 0,34 mm <sup>2</sup> x 0,5 m ± 5 %, PVC
Protection type	IP 65 acc to IEC529 / EN 60529
Max. pressure	5 bar

EU Conformity
acc. to directive 2006/95/EC

General details
<p>Repeatability of switching points is ±0,05 mm based on the same geometrical conditions as of a switch device.                      The measures of the switching points refer to a fluid-density of 1 g/cm<sup>3</sup>.                      The tolerance of the switching points is ±2 mm                      Pay attention to the contact protection, when switching inductive or capacitive loads. Maximum data must not be exceeded!</p>

Inductive loads
<div style="display: flex; justify-content: space-around;"> <div style="width: 22%;"> <p><b>Direct current</b></p>  <p>Suppression of voltage peaks with a free-wheeling diode</p> </div> <div style="width: 22%;"> <p><b>Alternating voltage</b></p>  <p>Suppression of voltage peaks with a VDR</p> </div> <div style="width: 22%;">  <p>Suppression of voltage peaks with an RC element</p> </div> <div style="width: 22%;">  </div> </div>

Capacitive loads and lamp loads
   <p>Contact protection with resistors for limiting current</p>