


Safety switch

Series Safety Hinge Switch SHS3

Description SHS3-U1Z-SA-R


Article number 6019390042

Operating symbol




The colour allocation refers to the plug-incables which we have in our range.

PLUG




Operating diagram




Fixing point in the range 0° ... 270° freely selectable



Tolerances: switching angle (opening) ± 1.5 °, direct opening torque 10 %, direct opening angle + 2°

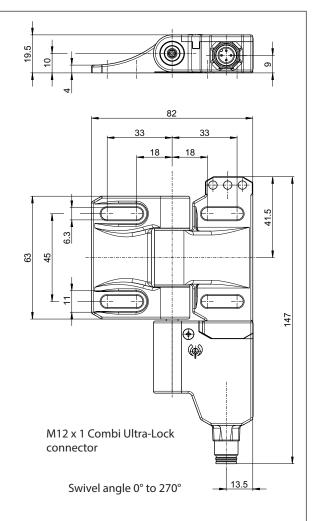



BERNSTEIN AG . Hans-Bernstein-Straße~1~.~32457~Porta~Westfalica~.~www.bernstein.eu



4-pin connector (A-coded)	M12x1 with jiggle protection and mo	olded cable	
Article number	Description	cable length x	Version
3251004310	AN-KAB.SHS3 4P 2M GERADE	2 m	straight
3251004311	AN-KAB.SHS3 4P 5M GERADE	5 m	straight
3251004312	AN-KAB.SHS3 4P 10M GERADE	10 m	straight
3251004313	AN-KAB.SHS3 4P 2M WINKEL	2 m	angled
3251004314	AN-KAB.SHS3 4P 5M WINKEL	5 m	angled
3251004315	AN-KAB.SHS3 4P 10M WINKEL	10 m	angled
Conn	ector straight	Connec	tor angled
112 44 116.8		M12x1	50 x

Article number	led) M12x1 with Ultra Lock quick-connect		Version
	Description	cable length x	
3251004316	AN-KAB.SHS3 4P U.L. 2M GERADE	2 m	straight
3251004317	AN-KAB.SHS3 4P U.L. 5M GERADE	5 m	straight
3251004318	AN-KAB.SHS3 4P U.L. 10M GERADE	10 m	straight
3251004319	AN-KAB.SHS3 4P U.L. 2M WINKEL	2 m	angled
3251004320	AN-KAB.SHS3 4P U.L. 5M WINKEL	5 m	angled
3251004321	AN-KAB.SHS3 4P U.L. 10M WINKEL	10 m	angled
Connector straight		Connect	tor angled
10.3 44.5 x		31 N12x1 01 Ø16.5	50 ×

Electrical Data		
Rated insulation voltage	Ui	250 V
Conv. thermal current	I_{the}	4 A
Rated operational voltage	U_e	230 V AC; 24 V DC
Utilization category		AC-15, U _e /I _e 230 V / 3 A; DC-13, U _e /I _e 24 V / 1 A
Direct opening action	\odot	acc. to IEC/EN 60947-5-1, annex K
Short-circuit protective device		Fuse 4 A gG
Protection class		II (protective insulation)

Technical Data



Mechanical data	
Enclosure	PBT
Hinge	Cast stainless steel
Ambient air temperature	-25 °C to +70 °C (connecting cable permanently mounted; no freezing over / no condensation)
Contact type	Slow make and break contacts (1 N.C., 1 N.O.)
Mechanical life	1 x 10 ⁶ operating cycles (High forces, unfavourable force application as well as dynamic loads can shorten the service life.)
Switching frequency	max. 300 switching operations / hour
Attachment	4 x M6 screws DIN EN ISO 7984 (on flat and stiff ground)
Connection type	M12 plug connector / Ultra-Lock connector, A coded
Weight	≈ 0,45 kg
Installation position	operator definable
Protection type	IP 67 in acc. with IEC/EN 60529
Switching angle	+/- 3 ° from fixing point for the N.C. contacts and 9° for the N.O. contact
Forced disconnect angle	6°+2° from fixation point in both directions (for 0°-3° only in Plus-direction, for 267°-270° only in Minus-direction)
Forced disconnect torque	1,5 Nm
Mechanical load	F _{R1} = max. 1800 N
(see dimensioned drawing for the	F _{R2} = max. 750 N
introduction direction of the forces)	$F_A = max. 1800 N$

ID for safety engineering	
B10d	2 x 10 ⁶ switching cycles

Standards	
DIN EN 60947-5-1	
DIN EN ISO 13849-1	

EU Conformity		
	acc. to directive 2006/42/EC (Machinery Directive)	

Approvals	
DGU\	
CCC	
cCSA	_{IS} B300

Technical Data



Notes

The safety fixture must always be attached by at least two SHS! See max. load.

If the risk assessment of the machine permits a single-channel evaluation, an empty hinge can be used as the support element. High forces, unfavourable force application as well as dynamic loads can shorten the service life.

If the SHS is used at an ambient temperature of 70 °C, it is possible that the connecting cable will age more rapidly!

The connecting cable must be protected against mechanical damage.

The cable can be installed in tubes or cable ducts.

The manufacturer / supplier of the machine / system is obligated to observe the applicable standards for the size of the safety intervals between the separating safety fixture and the hazard point.

These regulations include: DIN EN 349, DIN EN 953, DIN EN ISO 14119, DIN EN ISO 13857, \dots

The switch may not be used as a stop.

For a CSA/UL application it is essential to use CSA/UL approved cable for connection.

The suggested protection type (IP code), applies only when at least an equivalent cable coupling is used.