


## **Plastic bodied limit switch**

Series IN65

Description IN65-E2 AF

Article number 6083000342

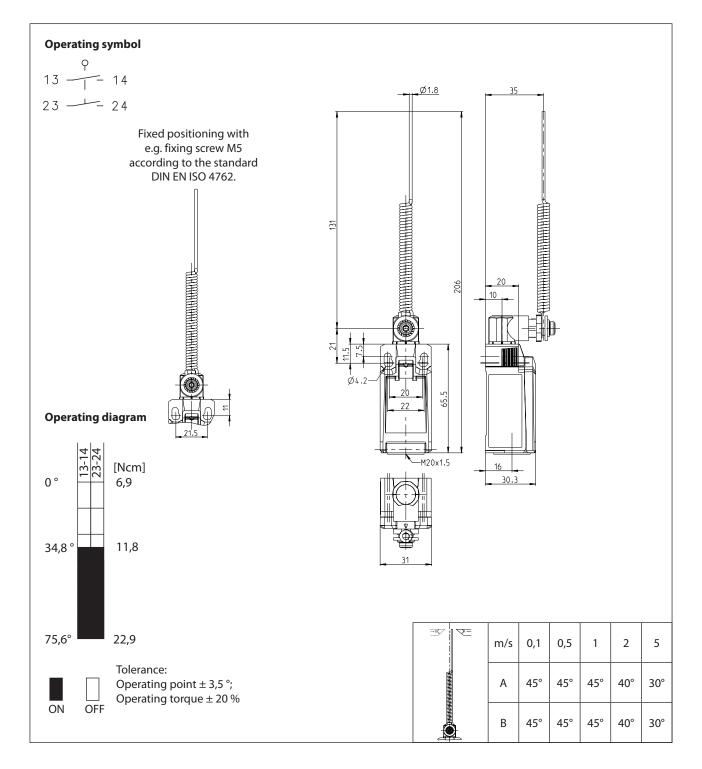

**BERNSTEIN AG** . Hans-Bernstein-Straße 1 . 32457 Porta Westfalica . www.bernstein.eu



Electrical Data					
Rated insulation voltage U <sub>i</sub>		400 V AC			
Rated impulse withstand voltage	$J_{imp}$	4 kV			
Rated operational voltage U <sub>e</sub>		240 V			
Rated supply frequency AC		50 / 60 Hz			
Overvoltage category		II acc. EN 60947-1 annex H table H1			
Conv. thermal current	the	5 A			
Minimum current		1 mA			
Utilization category		AC 15, U <sub>e</sub> /I <sub>e</sub> 240 V / 3 A DC 13, U <sub>e</sub> /I <sub>e</sub> 24 V / 1,5 A			
Short-circuit protective device		Fuse 4 A gG			
Rated conditional short-circuit current		400 A			
Max. contact resistance		25 mOhm (unused)			
Protection class		II, totally insulated			

Mechanical data						
Enclosure		Thermoplastic, glass fibre reinforced (UL 94-V0)				
Cover		Thermoplastic, glass fibre reinforced (UL 94-V0)				
Actuator		Spring lever (steel) / lever in 15 ° increments adjustable				
Operating temperature		-30 °C +75 °C				
Storage temperature		-40 °C +80 °C				
Protection type		IP66 / IP67 acc. EN 60529				
Pollution degree (built-in switch)		3				
Contact material		silver				
Device Class (built-in switch)		Category E (MC3+CC2+SC1) acc. EN 60947-1 annex Q				
Contact type		2 N.O. (Form Zb)				
Operating rate V		0,06 m/min ≤ V ≤ 30 m/min				
Bounce duration ms		The value depends on the operating rate.				
Switchover time ms		The value depends on the operating rate.				
Switching frequency		≤ 60 / min.				
Mechanical life		10 x 10 <sup>6</sup> operating cycles				
Mission time		≤20 years				
Connection		4 screw connections (M3)				
Conductor cross-sections		Solid or Litz wire with ferrules 0,34 mm <sup>2</sup> - 1,5 mm <sup>2</sup> ; AWG 22-16				
Cable entrance		1 x M20 x1,5				
Weight		≈ 0,10 kg				
Installation position		operator definable				

## Actuation

The actuating device is preferably started from 2 sides.

By lifting the clamp the actuation assembly can be rotated in 45° increments such that 16 actuation directions are possible. The actuation assembly is to be again fastened to the housing by lowering the clamp.

Standards	
	DIN EN 60947-5-1

EU Conformity	
	acc. to directive 2014/35/EU (Low-Voltage-Directive)

 $\textbf{BERNSTEIN AG} \ . \ Hans-Bernstein-Straße \ 1 \ . \ 32457 \ Porta \ Westfalica \ . \ www.bernstein.eu$ 

## **Technical Data**



N		

The degree of protection (IP code) specified applies solely to a property closed cover and the use of an equivalent cable gland with adequate cable.