


Photoelectric Sensors

Series M18

Description OT18RT-DPAP-0200-SE


Article number 6557018002


Wiring Diagram




If the control lead is connected to the + for a short time (0,1 ... 10s), the sensor is adjusted to a lower sensitivity.

More specifications about programing are available upon request



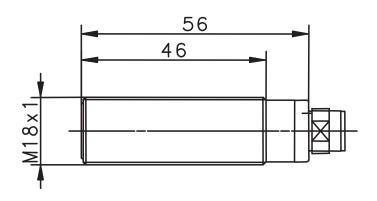

Typical sensing range

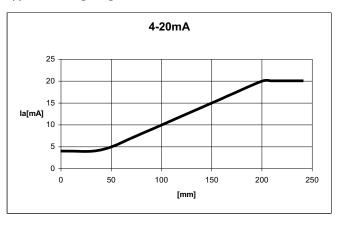

BERNSTEIN AG . Hans-Bernstein-Straße 1 . 32457 Porta Westfalica . www.bernstein.eu



Identifying characteristics in accordance with EN 60947-5-2

Electrical data		
Sensing range	S _d	200 mm (adjustable by Control-Input); panel: 100 mm x 100 mm, white, maximum sensing range
Switching element function		analog, programmable, permanent overload protection
Repeat accuracy	R	≤ 1 %
Operational voltage range	$U_{\mathtt{B}}$	10-30 V DC
Rated insulation voltage	U_{i}	75 V DC
Rated impulse withstand voltage	U_{imp}	500 V
Voltage drop	U_d	≤5 V
Utilization category		DC-12
No-load supply current	Io	< 40 mA
Ambient light proof		10 kLux
False polarity protection		yes
Time delay before availability	t _v	< 300 ms

Electromagnetic compatibility (EMC)					
Electromagnetic field test	IEC 61000-4-3	3 V/m			
Electrostatic discharge test	IEC 61000-4-2	8 kV			
Electrical fast transient immunity test (Burst)	IEC 61000-4-4	2 kV			
Impulse voltage withstand ability (Surge)	IEC 61000-4-5	500 V, 1,2/50 μs @ Ri = 42 Ω			
Radiated disturbance field strength	EN 55011	\leq 40 dB (μ V/m)			

Mechanical Data	
Enclosure	PBT, black
End cap	PA66, black
Plain front type	PA12
Ambient air temperature	-5 °C +70 °C
Type of protection	IP67 in fully locked position with it's plugs
Pollution degree	3 (Pollution of the optic can cause impairments of the operating distances.)
Termination type	plug M12 x 1, PA
For attachment	Hexagonal / knurled nut, ABS black

EU Conformity		
	acc. to directive 2004 / 108 / EC	