


# Safety switch Series SLC

Description **SLC-F-024-01/21-R4**

Article number **6018200034**

Position monitoring (Interlock D / Guard lock L)	
Actuator inserted Guard closed and locked	Actuator inserted Guard closed and not locked
<p>without current</p>	<p>with current</p>
<pre>                     E1 o  oE2                     13 o  o 14 D                     21 o  o 22                     31 o  o 32                     43 o  o 44 L                 </pre>	<pre>                     E1 o  oE2                     13 o  o 14 D                     21 o  o 22                     31 o  o 32                     43 o  o 44 L                 </pre>
Actuator withdraw Guard not closed and not locked	
<p>with or without current</p>	
<pre>                     E1 o  oE2                     13 o  o 14 D                     21 o  o 22                     31 o  o 32                     43 o  o 44 L                 </pre>	

The actuator is not included in the scope of delivery. It can only be purchased in conjunction with the safety switch.

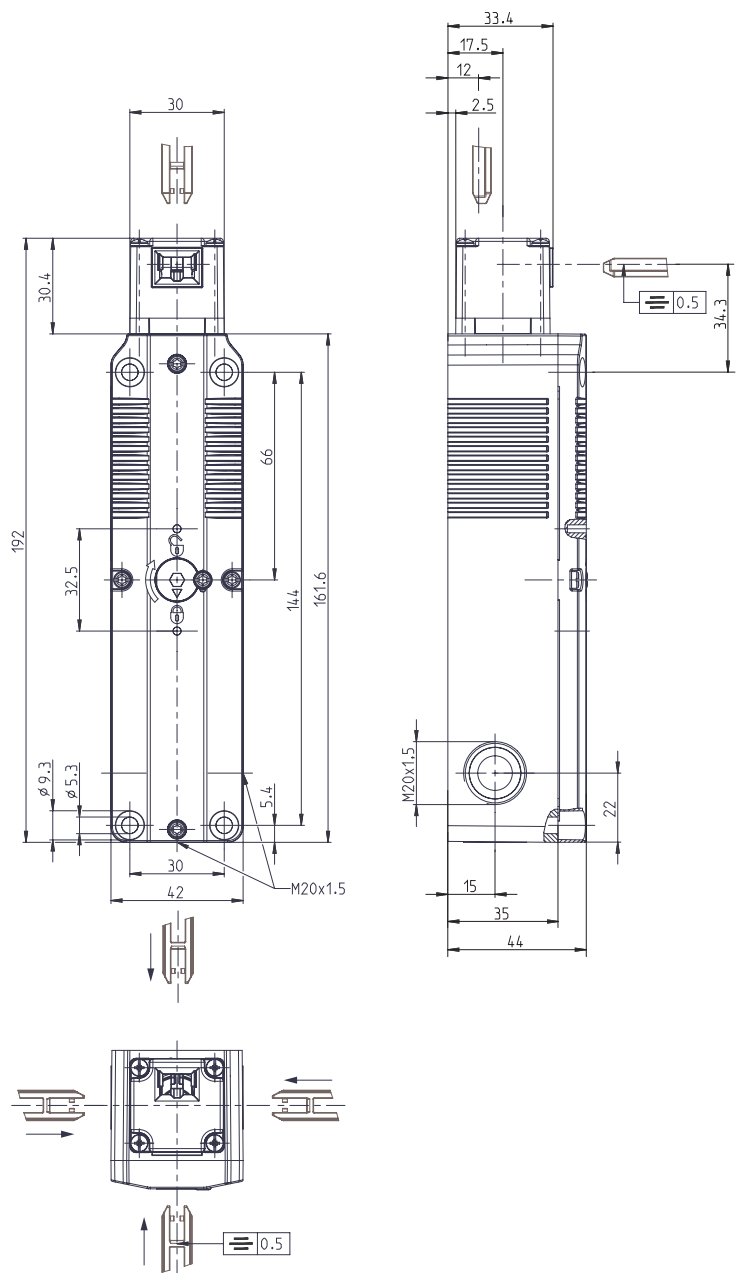

Electrical data	
Protection class	II, totally insulated
Contact elements	
Rated insulation voltage	$U_i$ 250 V
Rated impulse withstand voltage	$U_{imp}$ 2,5 kV
Rated operational voltage	$U_e$ 240 V AC / 24 V AC/DC
Conv. thermal current	$I_{the}$ 5 A
Utilization category acc. to IEC	AC-15, $U_e / I_e$ 240 V / 1,5 A DC-13, $U_e / I_e$ 24 V / 1,5 A; 250 V / 0,11 A
Utilization category acc. to UL / CSA	B300 R300 (same polarity)
Performance at min. current	1 mA, at 24V DC, $U_{KD}$ 2,4V DC
Direct opening action	⊖ according to IEC/EN 60947-5-1, Annex K
Short-circuit protective device	4 A gG
Rated conditional short-circuit current	400 A
Solenoid	
Duty cycle	100 % ED (at E1; E2)
Temperature class	F (155 °C)
Permanent power consumption	6,7 VA (W)
Switch operations permanent	10 / min
Operating voltage	24 V AC / DC (+10 % / -15 %)

Mechanical data	
Enclosure	Thermoplastic, glass fibre reinforced (UL 94-V0)
Cover	Thermoplastic, glass fibre reinforced (UL 94-V0)
Actuating device	Thermoplastic, glass fibre reinforced / Zn-GD
Operation	Separate actuator
Minimum actuating radius	$R_{min}$ see data sheet actuator
Approach speed	$V_{max}$ 0,5 m/s
Extraction force	≤ 10 N
Guard locking principle	Spring force
Unlocking	a) Magnetic force b) Auxiliary release from front and back side
Holding force	$F_{Zh}$ 1500 N (EN ISO 14119)
Ambient air temperature	-25 °C to +55 °C
Contact function	Interlock (D): 1 NO Guard lock (L): 2 NC, 1 NO
Switching principle	4 Slow-action switching contacts
Mechanical life	1 x 10 <sup>6</sup> Switching cycles
Assembly	4 x M5
Connection	Screw connection
Conductor cross-sections	0,34 - 1,5 mm <sup>2</sup> flexible
Cable entrance	3 x M20x1,5
Weight	≈ 0,484 kg
Installation position	any
Protection type	IP67 acc. to IEC/EN 60529 ; (UL 50 E / CSA C22.2) Type 6 indoor use only

ID for safety engineering	
B10d	2 x 10 <sup>6</sup> Cycles (at DC-13; 24 V; 0,1 A)

Standards	
	DIN EN 60947-5-1, DIN EN 60947-5-4
	UL 508 18th Edition, CSA-C22.2 No.14-18
	GS-ET-19 (DGUV)
	DIN EN ISO 14119
	DIN EN ISO 13849-1

EU Conformity	
	acc. to directive 2006/42/EC (Safety-of-Machinery-Directive)

Approvals	
	DGUV
	cCSA <sub>US</sub>
	CCC

Notes	
<p>The degree of protection (IP code) specified applies solely to a property closed cover and the use of an equivalent cable gland with adequate cable.</p> <p>The safety switch must not be used as end stops.</p> <p>In the event of a power failure, the guard remains locked.</p>	