


## Float switch

### Series Miniature-Float switch

Description **MSK4-MS-R3/4ST-S 0850**

Article number **6891240007**

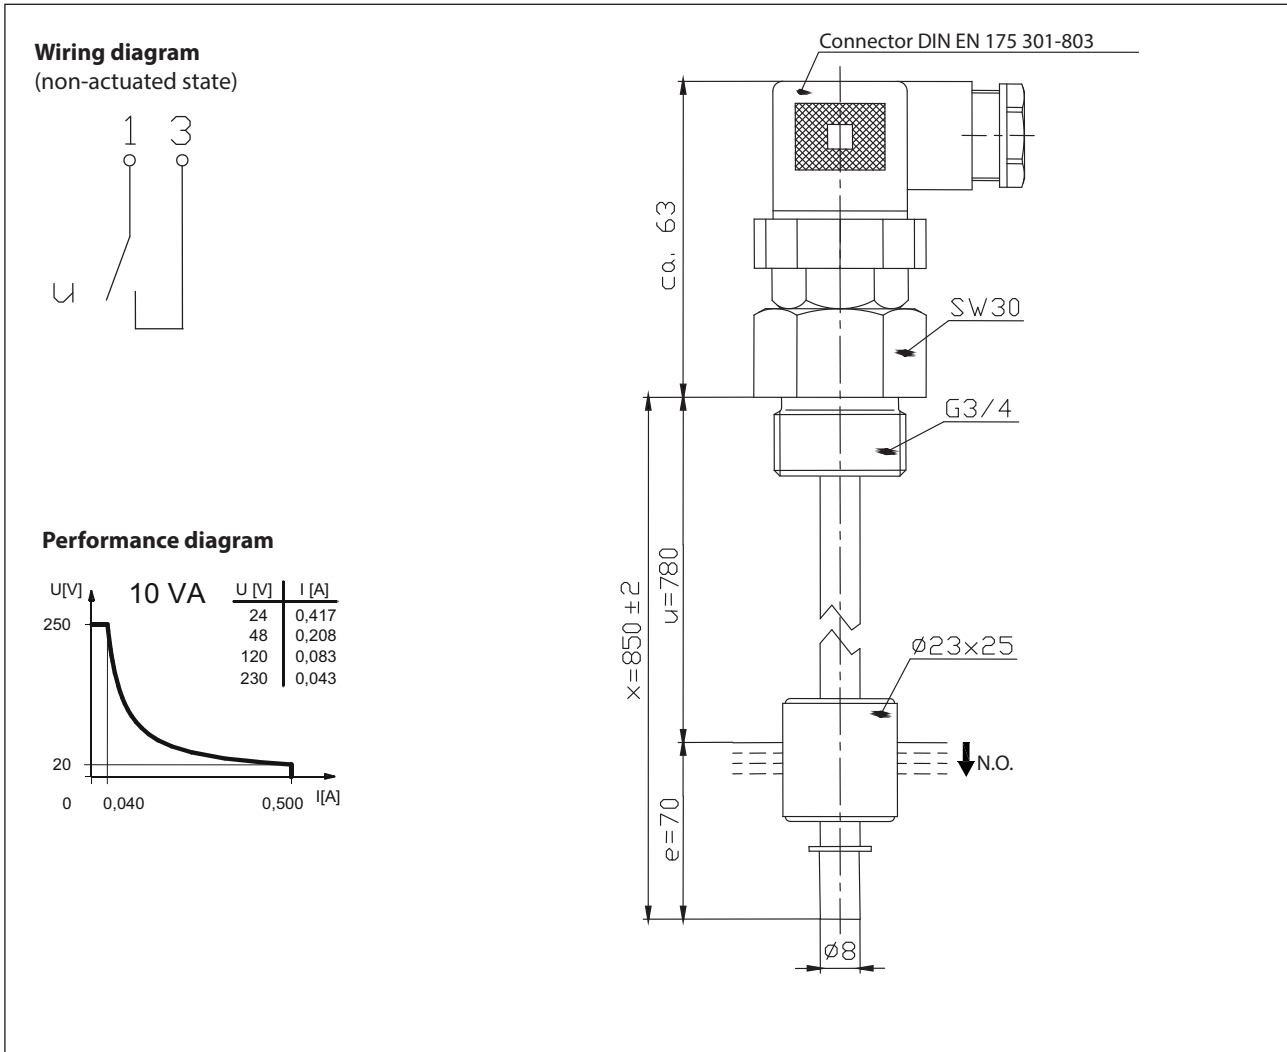

#### Characteristic features in accordance with EN 60947-5-1

Electrical data	
max. switching voltage	250 V
max. switching current	0,5 A
max. switching capacity	10 VA
mechanical life	10 <sup>7</sup> to 10 <sup>9</sup> switches depending on the load
Switching element	1 N.O., falling level
Protection class	II (totally insulated)

Mechanical data	
Bolting material	CuZn39Pb3 (2.0401)
Switching tube material	CuZn37 (2.0321)
Float material	NBR
- density	about 0,6 g/cm <sup>3</sup> ±10 %
- depth of immersion	16 mm ± 2 mm ( to a fluid-density of 1 g/cm <sup>3</sup> )
Gasket material	Silicone
Grip screw material	CuSn8 (2.1030)
Ambient air temperature	-5 °C to +60 °C
Liquid temperature	-5 °C to +60 °C
Connection	Connector acc. to DIN EN 175 301-803
Protection type	IP 67 acc to IEC529 / EN 60529 (only in fully locked position with it's plugs)
Max. pressure	15 bar

EU Conformity
acc. to directive 2006/95/EC

General details
<p>Repeatability of switching points is ±0,05 mm based on the same geometrical conditions as of a switch device.                      The measures of the switching points refer to a fluid-density of 1 g/cm<sup>3</sup>.                      The tolerance of the switching points is ±2 mm                      Pay attention to the contact protection, when switching inductive or capacitive loads. Maximum data must not be exceeded!</p>

Inductive loads
<div style="display: flex; justify-content: space-around;"> <div style="text-align: center;"> <p>Direct current</p> <p>Suppression of voltage peaks with a free-wheeling diode</p> </div> <div style="text-align: center;"> <p>Alternating voltage</p> <p>Suppression of voltage peaks with a VDR</p> </div> <div style="text-align: center;"> <p>Suppression of voltage peaks with an RC element</p> </div> </div>

Capacitive loads and lamp loads
<div style="display: flex; justify-content: space-around;"> <div style="text-align: center;"> </div> <div style="text-align: center;"> </div> <div style="text-align: center;"> </div> </div> <p>Contact protection with resistors for limiting current</p>